TITLE OF THE INVENTION

SEMICONDUCTOR DEVICE AND MANUFACTURING METHOD OF THE SAME

CROSS-REFERENCE TO RELATED APPLICATIONS

5   This is a Continuation-in-Part application of U.S. Patent Application No. 09/995,839, filed November 29, 2001, the entire contents of which are incorporated herein by reference.

This application is based upon and claims the

10   benefit of priority from the prior Japanese Patent Application No. 11-066293, filed March 12, 1999, and the entire contents of which are incorporated herein by reference.

BACKGROUND OF THE INVENTION

15   1. Field of the Invention

The present invention relates to a manufacturing method of semiconductor devices by using a dry etching technology. More particularly, the present invention relates to a method of forming an interlayer insulating

20   film of a dual trench metallization using an organic silicon film such as polysilane, a method of forming a contact hole and a trench, a method forming a deep trench, a method of removing an antireflection film, a method of forming a trench metallization of low

25   interwiring coupling capacitance, and a semiconductor device manufactured by using these methods.

2. Description of the Related Art

When a process for manufacturing semiconductor devices each having a multilayered metallization is performed, a step is frequently employed whereby the pattern of a contact hole or the like is formed on a multilayered insulating film constituted by, for example, a silicon oxide film, silicon nitride film and the like, such that a resist serves as a mask.

Hitherto, when a selective etching step of the silicon oxide film and the silicon nitride film is performed by using dry etching technology such as reactive ion etching (RIE), the selective ratio (the ratio of etching speeds) between the resist and the silicon oxide film can be raised. The selective etching can easily be performed. Since the etching selective ratio between the resist and the silicon nitride film cannot be raised, selective etching of the silicon nitride film using the resist as a mask cannot easily be performed.

In recent years, the integration of miniature trench capacitors at a high density has been required to manufacture large scale semiconductor memory devices. Therefore, formation of trenches each having a great depth compared to the size of the opening portion (hereinafter called a "high aspect ratio") on a semiconductor substrate by using the anisotropic dry etching is one of the important techniques.

When the trenches each having a high aspect ratio are formed on a semiconductor substrate, also opening portions each having a high aspect ratio must be formed in an insulating film mask by using anisotropic

5   dry etching. Hitherto, a resist mask has been employed to form the opening portions in the insulating film mask. To form opening portions each having a high aspect ratio, gas plasma excited by high power and high frequency radiation must be applied to

10   the resist for a long time.

This leads to a fact that the opening portions in the resist are unevenly deformed. Therefore, a plurality of trenches each having a smooth inner surface and exhibiting satisfactory accuracy cannot

15   easily be formed with a high yield in the semiconductor substrate.

As microfabrication technology progresses, the thickness of the resist must be reduced to raise the resolution of lithography. Since so-called film

20   thinning occurs when the dry etching is performed, the trenches cannot easily be formed.

A common method of manufacturing semiconductor devices incorporates a smoothing process having the steps of forming isolation trenches for isolating

25   devices from one another by using a silicon nitride film, the pattern of which has been formed on a semiconductor substrate as an etching mask,

forming a thick silicon oxide film for isolating the
devices from each other such that the isolation
trenches are buried, and polishing the surface such
that the silicon nitride film serves as a stopper
5   (a suppression layer) so that the isolation trenches
are buried with the oxide film and the device region
is smoothed.

Where a plurality of silicon nitride film
stoppers present in portions of high density device
10   regions, the process for smoothing the device region
using polishing of the surface enables satisfactory
smoothing of the surface such that the isolation
trenches are filled with the silicon oxide film. In
the portions of low density device regions, the number
15   of silicon nitride film stoppers is insufficiently
small. Thus, the silicon oxide film is excessively
polished in the smoothing process. As a result, there
arises a problem in that smoothing and formation of
the device regions cannot be performed uniformly over
20   the overall surface of the wafer.

Therefore, a countermeasure is taken whereby a
polysilicon film is deposited on the overall surface,
and then a smoothing process is performed and the
polysilicon film, as the etching mask, is left in the
25   low density portion. The smoothing step, however,
sometimes encounters a crack in the silicon oxide film
in the low density portion. When the silicon nitride

film stoppers on the device region and the polysilicon mask are removed, there arises a problem in that the silicon substrate is scooped out excessively.

Hitherto, a gate electrode has been formed by a method comprising the steps of forming a silicon nitride film on a metallic film for forming the gate electrode, forming a resist in a gate electrode formation region on the silicon nitride film, using the resist as a mask to form a nitride film, and using the silicon nitride film having a pattern formed after the resist mask has been removed to form the metallic film as the gate electrode.

If the surface of the wafer has an uneven portion, the projecting portions of the surface of the wafer are excessively etched when the pattern of the silicon nitride film is formed. As a result, the metallic film formed below the pattern is undesirably etched, causing a problem to arise in that a gate electrode formation cannot be satisfactorily performed.

When an etching process is performed to form a self-aligned contact (hereinafter abbreviated as a "SAC"), an opening of a contact hole is created in an interlayer insulating film for burying the space between the gate electrode. At this time, an edge line along which the upper surface and the side surface of the gate electrode intersect is exposed in

the lower portion of the opening of the contact hole.

Undesirable etching of the gate electrode must be prevented during the etching process for opening the contact hole in the interlayer insulating film constituted by the silicon oxide film. Therefore, the gate electrode is usually coated with a silicon nitride film (an etching stopper) which has a high etching selective ratio with respect to the silicon oxide film. Although a satisfactory high etching selective ratio of the silicon nitride film with respect to the oxide film can be obtained in a flat portion, the etching selective ratio is lowered to about 1/3 or less of the flat portion in the edge line portion.

Therefore, the edge line portion of the gate electrode is undesirably etched when the contact hole is opened in the SAC formation step. Thus, the gate metal is exposed to the outside, causing a short-circuit fault to occur when the metal for the metallization is buried in the contact hole. As a result, it is known that the SAC cannot easily be formed in the process for manufacturing E^2 PROM in which the gate electrode has a high aspect ratio (the ratio of the length of the gate and the height of the gate).

Since microfabrication technology has proceeded in recent years, etching of the interlayer insulating

film at a high aspect ratio is frequently required.
It is known that when dry etching of the silicon oxide
film at a high aspect ratio is performed under the
condition where a high etching selective ratio with
5   respect to the silicon nitride film is permitted,
residues such as fluorocarbon are left in the opening
portion during the progress of the etching operation.
Thus, etching is interrupted.

As a technology for forming a multilayered
10   metallization, double-trench metallization (called a
"dual-damascene structure" in this industrial field)
is employed frequently. When fabrication of the
interlayer insulating film having the dual-damascene
structure is performed, miniaturized dry etching
15   process technology is required which is a combination
of trench formation for burying two layered
metallizations and contact hole formation for
connecting the two layered metallizations to each
other.

20   Hitherto, it is very difficult to control the
depth of the trenches in the surface of the wafer when
the trenches are formed in the interlayer insulating
film. To realize the control, a method has been
employed with which a silicon nitride film is inserted
25   into the interlayer insulating film constituted by the
silicon oxide film, so that the silicon nitride film
is used as the stopper for the dry etching. When the

dual-damascene structure having a complicated shape is formed, the stopper constituted by the silicon nitride film is required to control the depth of the trench

5 metallization of the upper layer after the contact hole has been formed.

In the foregoing case, the silicon nitride film, which has a dielectric constant higher than that of the silicon oxide film, is contained adjacent to the metallization. Therefore, the wiring capacitance is

10 enlarged excessively, causing the operation speed of the semiconductor device to be reduced. When the trenches are formed, partial etching of the interlayer insulating film constituted by the silicon oxide film occurs. Thus, ions are concentrated in the bottom

15 corners of each trench, causing a shape called "trenching" to be formed in the corners of each trench. Therefore, the wiring metal cannot be easily buried in the trench.

Hitherto, an LSI of a type having a mixed

20 structure so that a DRAM (Dynamic Random Access Memory) and a logic are mounted on one chip is structured such that the alignment margin (a fringe) in the logic portion is about 1/4 of the alignment margin in the DRAM, owing to the difference in the

25 design rule between the DRAM section and the logic section.

In an example case in which a contact hole is

formed in an interlayer insulating film having the dual-damascene structure, the following step is employed: a dry etching condition where a high selectivity with respect to the etching stopper

5 constituted by the silicon nitride film on the lower trench metallization is used to form the contact hole in the interlayer insulating film constituted by the silicon oxide film. Then, the silicon nitride film is removed, and then the wiring metal is buried in the

10 contact hole and trenches of the upper metallization.

In the logic section, having a small alignment margin, a portion of the opening of the contact hole is sometimes deviated to the outside of the stopper constituted by the silicon nitride film which covers

15 the lower trench metallization. Therefore, the interlayer insulating film constituted by the silicon oxide film which buries the side surface of the lower trench metallization easily encounters borderless etching that is cut during the step of forming the

20 contact hole. Therefore, there arises a problem in that a fault in burying and a short-circuit fault of the wiring metal occur.

Hitherto, polysilane anti-reflective film is formed below the resist in the lithography step. When

25 the resist is removed by performing O_2 ashing after the pattern has been formed, a phenomenon undesirably occurs in that polysilane is oxidized. Thus, oxidized

polysilane cannot easily be removed.

Also, with progress in the miniaturization and operating speed of semiconductor devices, the wiring structure has progressed from a single layer structure

5   into a multi-layered structure so as to arrive at the stage that a semiconductor device having a multi-layered wiring structure including five or more layers has been developed and manufactured. However, with progress in the degree of miniaturization, the

10   operating speed and the multi-layered structure, the signal transmission delay caused by the so-called "inter-wiring parasitic capacitance" and the wiring resistance is brought about as a serious problem.

Various measures are taken for avoiding the

15   signal transmission delay. For example, Cu having a resistivity lower than that of Al is used as a wiring material in order to decrease the wiring resistance. Since it is very difficult to process a Cu film into the shape of the wiring by the dry etching process as

20   in the prior art, a damascene structure is employed in the case of a Cu wiring. On the other hand, a so-called "low-k material" having a dielectric constant lower than that of SiO_2 is used as an insulating material in order to decrease the inter-wiring

25   parasitic capacitance.

However, with further progress in the degree of miniaturization of the semiconductor device in the

future, it is expected that it will be difficult to
cope with the signal transmission delay caused by the
inter-wiring parasitic capacitance and the wiring
resistance by simply employing the wiring structure
5   using the low-k material and Cu in combination. Also,
an additional problem is generated that the processing
of the insulating film and the burying of the wiring
material will be rendered difficult.

                    BRIEF SUMMARY OF THE INVENTION
10   As described above, the conventional
manufacturing method of semiconductor devices by using
dry etching technology suffers from problems that
etching at a high aspect ratio cannot easily be
performed, smoothing of the overall surface of the
15   wafer cannot easily be performed when the device
region has some deviation in density of devices, the
surface roughness causes defective fabrication when
a miniaturized gate electrode is formed and short-
circuit fault easily occurs in the edge line portion
20   of the gate electrode when the SAC hole is formed.

        Moreover, there arises a problem in that etching
is interrupted owing to residues produced in the dry
etching step when etching of an interlayer insulating
film at a high aspect ratio is performed. Another
25   problem arises in that a necessity for stacking a
silicon nitride film to serve as an etching stopper to
make the depths of the formed trenches uniform and to

prevent borderless etching reduces the operation speed
of the semiconductor device. In addition, trenching
occurring when the trenches are formed causes a fault
in burying of the wiring metal. Since the alignment

5   margin in the logic section is too small, borderless
etching easily occurs when a mixed memory logic LSI is
manufactured. Another problem arises in that
polysilane used to form the reflection preventing film
for the resist cannot easily be removed.

10   Also, with further progress in the degree of
miniaturization in the wiring structure of an LSI,
a problem is generated that it will be difficult to
cope with the signal transmission delay caused by the
inter-wiring parasitic capacitance and the wiring

15   resistance by simply employing the wiring structure
using the low-k material and Cu in combination.
Thus, the conventional manufacturing method of
semiconductor devices by using dry etching technology
suffers from a multiplicity of problems.

20   To overcome the above-mentioned problems,
an aspect of the present invention is to provide
a method of forming a multilayered insulating film
by using an organic polysilicon film made of, for
example, polysilane, a removing method and a method of

25   forming an etching mask.
The manufacturing method of semiconductor devices
by using dry etching technology uses an organic

silicon film made of, for example, polysilane, which
is able to easily form a smooth surface by a coating
process and which can easily be dry-etched and
smoothed. The organic silicon film is laminated with
5   an insulating film such as a silicon oxide film or
a silicon nitride film, a metallic film for use in
metallization or the like. Alternatively, the organic
silicon film is formed on a semiconductor substrate
such that the organic silicon film forms a portion of
10   the foregoing element. While using the obtained
structure as a suppression layer or the like for
improving the processing shape of the insulating film
portion, the organic silicon film is microfabricated.
Thus, a portion comprising an interlayer insulating
15   film having a complicated dual-damascene structure is
formed. Then, for example, oxygen is introduced into
the organic silicon film so as to change the organic
silicon film into an insulating film constituted by an
organic silicon film oxide film and the like. Thus,
20   a required constituting element of a semiconductor
device is provided.

    For example, some of the organic silicon film,
which has the silicon and silicon bonds as the main
chain thereof, has anti-reflective property. The
25   organic silicon film cannot be used, as it is, as
an insulating film of a semiconductor device. When a
step of introducing oxygen or the like is performed,

such organic silicon film can be employed as the insulating film of the semiconductor device.

As described above, according to the present invention, control of the shape and the depth of the metallization trench, formation of a contact hole having a high aspect ratio, prevention of borderless etching and improvement of problems occurring in a smoothing step, which have been difficult for the conventional dry etching step, can be performed. Moreover, a new method of removing polysilane employed as an anti-reflective film is provided.

Further, the present invention provides a semiconductor device having a wiring structure capable of coping with further progress in the degree of miniaturization and in the number of layers included in the multi-layered structure, and a method of manufacturing the particular semiconductor device.

Specifically, a manufacturing method of semiconductor devices by using dry etching technology according to an aspect of the present invention comprising the steps of: forming a organic silicon film on a semiconductor substrate, dry-etching the organic silicon film to form a portion that must be formed by the insulating film of the semiconductor device by using the organic silicon film, and changing the organic silicon film into an insulating film so that the portion of the semiconductor device

constituted by the insulating film is formed.

According to another aspect of the present
invention, there is provided a semiconductor device,
comprising: a first wiring structure formed on a

5   semiconductor substrate and including a first plug and
a first wiring formed on the first plug; and a second
wiring structure formed on the semiconductor substrate
belonging to the wiring layer equal to the first wiring
structure and including a second plug and a second

10   wiring formed on the second plug; wherein the upper
surface of the first wiring is positioned higher than
the upper surface of the second wiring, and the lower
surface of the first wiring is positioned flush with or
lower than the upper surface of the second wiring.

15   According to still another aspect of the present
invention, there is provided a method of manufacturing
a semiconductor device, comprising forming a first
insulating film on a semiconductor substrate;
selectively etching the first insulating film so as to

20   form a first wiring trench on the surface of the first
insulating film, a first contact hole extending through
that portion of the first insulating film which is
positioned between the bottom of the first wiring
trench and the semiconductor substrate, and a second

25   contact hole extending through the first insulating
film; burying a first conductive film in the first
wiring trench, the first contact hole and the second

contact hole; forming a second insulating film on the first insulating film having the first conductive film buried therein; selectively etching the second insulating film so as to form in the second insulating film a second wiring trench connected to the second contact hole and positioned substantially in parallel to the first wiring trench; and burying a second conductive film in the second wiring trench.

BRIEF DESCRIPTION OF THE SEVERAL VIEWS OF THE DRAWING

FIGS. 1A to 1F are cross sectional views showing steps of a manufacturing method of semiconductor devices according to a first embodiment;

FIGS. 2A to 2C are cross sectional views showing steps for describing effects of a manufacturing method of semiconductor devices according to a first embodiment;

FIGS. 3A and 3B are cross sectional views showing steps of a manufacturing method of semiconductor devices according to a second embodiment;

FIGS. 4A and 4B are cross sectional views showing steps for describing effects of the manufacturing method of semiconductor devices according to a second embodiment;

FIGS. 5A to 5D are cross sectional views showing steps of a manufacturing method of semiconductor devices according to a third embodiment;

FIGS. 6A to 6I are cross sectional views showing

steps of a manufacturing method of semiconductor
devices according to a fourth embodiment;

FIGS. 7A to 7C are cross sectional views showing
steps of a manufacturing method of semiconductor
devices according to a fifth embodiment;

FIGS. 8A to 8C are cross sectional views showing
steps of a manufacturing method of semiconductor
devices according to a sixth embodiment;

FIGS. 9A to 9C are cross sectional views showing
steps of a manufacturing method of semiconductor
devices according to a seventh embodiment;

FIGS. 10A to 10C are cross sectional views
showing steps of a manufacturing method of
semiconductor devices according to an eighth
embodiment;

FIGS. 11A to 11C are cross sectional views
showing steps of a manufacturing method of
semiconductor devices according to a ninth embodiment;

FIGS. 12A and 12B are cross sectional views
showing steps of a manufacturing method of
semiconductor devices according to a tenth embodiment;

FIGS. 13A to 13C are cross sectional views
showing steps of a manufacturing method of
semiconductor devices according to an eleventh
embodiment;

FIGS. 14A to 14C are cross sectional views
showing steps of a manufacturing method of

semiconductor devices according to a twelfth
embodiment;

FIGS. 15A to 15C are cross sectional views
showing steps of a manufacturing method of
5   semiconductor devices according to a thirteenth
embodiment;

FIGS. 16A to 16E are cross sectional views
showing steps of a manufacturing method of
semiconductor devices according to a fourteenth
10   embodiment;

FIGS. 17A to 17D are cross sectional views
showing steps of a manufacturing method of
semiconductor devices according to a fifteenth
embodiment;

15   FIGS. 18A to 18E are cross sectional views
showing steps of a manufacturing method of
semiconductor devices according to a sixteenth
embodiment;

FIGS. 19A to 19D are cross sectional views
20   showing steps of a manufacturing method of
semiconductor devices according to a seventeenth
embodiment;

FIGS. 20A to 20C are cross sectional views
showing steps of a manufacturing method of
25   semiconductor devices according to an eighteenth
embodiment;

FIGS. 21A to 21E are cross sectional views

showing steps of a manufacturing method of
semiconductor devices according to a nineteenth
embodiment;

5   FIGS. 22A to 22C are cross sectional views
showing steps of a manufacturing method of
semiconductor devices according to a twentieth
embodiment;

FIGS. 23A to 23C are cross sectional views
showing steps of a manufacturing method of
10   semiconductor devices according to a twenty-first
embodiment;

FIGS. 24A to 24M are cross sectional views
collectively showing a method of manufacturing a
semiconductor device according to a twenty-second
15   embodiment;

FIGS. 25A to 25C are cross sectional views showing
a method of manufacturing a semiconductor device
according to a first modification of the twenty-second
embodiment;

20   FIGS. 26A to 26C are cross sectional views showing
a method of manufacturing a semiconductor device
according to a second modification of the twenty-second
embodiment;

FIGS. 27A and 27B are cross sectional views
25   showing a method of manufacturing a semiconductor
device according to a third modification of the twenty-
second embodiment;

FIGS. 28A to 28F are cross sectional views collectively showing a method of manufacturing a semiconductor device according to a twenty-third embodiment;

FIGS. 29A to 29F are cross sectional views collectively showing a method of manufacturing a semiconductor device according to a twenty-fourth embodiment;

FIGS. 30A to 30F are cross sectional views collectively showing a method of manufacturing a semiconductor device according to a twenty-fifth embodiment;

FIGS. 31A to 31F are cross sectional views collectively showing a method of manufacturing a semiconductor device according to a twenty-sixth embodiment;

FIGS. 32A to 32F are cross sectional views collectively showing a method of manufacturing a semiconductor device according to a twenty-seventh embodiment;

FIGS. 33A and 33B are cross sectional views showing a method of manufacturing a semiconductor device according to a modification of the twenty-seventh embodiment;

FIGS. 34A to 34C are cross sectional views collectively showing a method of manufacturing a semiconductor device according to a twenty-eighth

embodiment of the present invention;

FIGS. 35 to 38 are cross sectional views collectively showing the construction of a semiconductor device according to a twenty-ninth embodiment;

FIGS. 39A to 39D are plan views showing various wiring layouts on VLSI chips according to a thirtieth embodiment; and

FIG. 40 is a diagram showing a dry etching apparatus for use in the manufacturing method of semiconductor devices according to a thirty-first embodiment.

DETAILED DESCRIPTION OF THE INVENTION

Referring to the drawings, embodiments of the present invention will now be described.

<First embodiment>

Referring to FIGS. 1A to 1F and FIGS. 2A to 2C, a first embodiment of the present invention will now be described. FIGS. 1A to 1F are diagrams showing the structure of an interlayer insulating film having a contact hole that is required to constitute a dual-damascene structure. FIGS. 2A to 2C are diagrams showing a method of forming the dual-damascene structure by performing dry etching and problems experienced with the method.

The interlayer insulating film for forming the dual-damascene structure is subjected to first trench

formation for forming a first trench metallization, second trench formation for forming a second trench metallization and formation of a contact hole for connecting the first and second trench portions to

5   each other.

As shown in FIG. 1A, an insulating film 2 is formed on a silicon substrate 1. To bury the first trench formed in the insulating film 2, a wiring metal 3 having the periphery coated with a silicon nitride

10   film 4 is formed. The material of the insulating film 2 is usually a silicon oxide film. The surface of the insulating film 2 is smoothed by CMP by using the silicon nitride film 4 as a stopper (a suppression layer for use in a polishing step). Since the step of

15   forming the trench metallization in the first layer shown in FIG. 1A is not directly related to the first embodiment, the step is omitted from description.

Then, an insulating film made of the same material as that of the smoothed insulating film 2 is

20   stacked on the insulating film 2, as shown in FIG. 1B. Then, anisotropic etching is performed by RIE so that a contact hole 5 is formed. At this time, the silicon nitride film 4 serves as an etching stopper (a suppression layer against etching).

25   Then, as shown in FIG. 1C, the overall surface is coated with polysilane 6. The thickness of the polysilane 6 is made to be the same as the second

trench. Since the polysilane 6 flows, the inside
portion of the contact hole 5 is buried with the
polysilane 6. Moreover, the surface of the polysilane
6 is sufficiently smoothed in a coating step so that
the depth of the second trench is uniformed over the
surface of the wafer.

Then, a resist 7 is applied to form the second
trench in the polysilane 6. To form the second
trench, an opening portion is formed. The resist 7 is
used as a mask, the polysilane 6 is anisotropically
etched by RIE under condition that the polysilane 6
has a high etching selective ratio with respect to the
insulating film 2. Thus, as shown in FIG. 1D, the
second trench 8 can be formed by using the insulating
film 2 and the silicon nitride film 4 as etching
stoppers, the formation being enabled without any
exertion of an influence on the shape of the contact
hole 5.

The RIE etching conditions were such that the
pressure in a chamber was 75 mTor, the high frequency
power was 300 W, and flux ratio of mixed gas Cl_2/O_2
was 75 sccm/10 sccm. Under the foregoing conditions,
a high etching selective of about 100 was realized
between the insulating film 2 constituted by a silicon
oxide film (SiO_2) and the polysilane 6.

The polysilane 6 can easily and precisely be
anisotropically etched by the RIE. Moreover, an

etching selective ratio of about 50 can be realized
with respect to the silicon nitride film 4.
Therefore, the polysilane 6 which buries the inside
portion of the contact hole 5 can completely be

5   removed such that the silicon nitride film 4 is left.

Then, an O_2 ashing step is performed to remove
the resist 7. At this time, the temperature of the
silicon substrate 1 is raise to about 250℃ so that
oxygen is introduced into the polysilane 6 via thermal

10   diffusion. Therefore, the polysilane 6 is changed to
a silicon oxide film so as to be a portion of the
insulating film 2. The silicon oxide film changed
from the polysilane 6 has a crystal structure near
SiO_2 if the degree of oxidation is intense. Also from

15   a viewpoint of electrical properties, the silicon
oxide film can be considered as an insulating film
constituted by SiO_2.

Thus, the polysilane 6 is formed into a portion
of the insulating film 2, as shown in FIG. 1E. Thus,

20   the interlayer insulating film 2 having the dual-
damascene structure incorporating the contact hole 5
and the second trench 8 can precisely be formed.

Then, as shown in FIG. 1F, the silicon nitride
film 4 covering the upper portion of the wiring metal

25   3 is removed by the RIE etching conditions with
respect to a silicon nitride film. The material of
the wiring metal is deposited to bury the contact hole

5 and the second trench 8. The material of the wiring
metal may be Al-Cu or Cu. Then, the insulating film 2
is used as a stopper to remove an excess metallization
portion 3a by CMP. Thus, an excellent dual-damascene

5   structure having a shape that is controlled precisely
can be formed.

Referring to FIGS. 2A to 2C, other important
advantages of the method of forming the interlayer
insulating film having the dual-damascene structure

10   will now be described. Referring to FIG. 2A, a
situation in which misalignment of the etching mask
takes place when the contact hole 5 of the insulating
film 2 is formed will now be described.

If etching stoppers are unevenly distributed in

15   the plane when the surface of the insulating film made
of SiO_2 and the like is smoothed by the CMP, the
overall surface of the wafer cannot uniformly be
smoothed.

Therefore, the step of forming the contact hole

20   5, when allowed to proceed to a state shown in
FIG. 2A, encounters a fact that the thickness of the
insulating film 2 in a state before the contact hole
is formed varies.

To form the contact hole 5, which is able to

25   reliably reach the silicon nitride film 4 that covers
the wiring metal 3, in the insulating film thickness
variation, excessive anisotropic RIE must be performed

to realize a thickness larger than a predetermined thickness by 20% to 30%.

If the etching mask encounters misalignment, the silicon nitride film 4 cannot serve as the etching
5   stopper in the misaligned portion. Therefore, excessive etching occurs as shown in FIG. 2A, causing a fault in wiring. The above-mentioned excessive etching occurring in the bottom of the contact hole is called "borderless etching".

10   Hitherto, the interlayer insulating film having the dual-damascene structure has been performed such that the thickness of the insulating film 2 is the thickness shown in FIG. 1E. Moreover, the contact hole 5 is formed by the anisotropic RIE until the
15   silicon nitride film 4 is exposed to the outside. Then, the second trench 8 is formed by the anisotropic RIE.

Therefore, the thickness of the insulating film 2, when the contact hole 5 is formed, is enlarged
20   excessively. Thus, the anisotropic RIE which must be carried out excessively is performed. Since anisotropic RIE is further performed when the second trench 8 is formed, the borderless etching is subjected to two times the anisotropic RIE operations.
25   As a result, the occurrence of borderless etching is a critical problem that must be solved when the step of forming the interlayer insulating film having the

dual-damascene structure is performed.

In the first embodiment, the second trench 8 is formed by using the polysilane 6. Therefore, the thickness of the insulating film 2 when the contact hole 5 is formed is small. Hence it follows that borderless etching of the insulating film 2 shown in FIG. 2A can be prevented. Since the insulating film 2 is formed by using the polysilane that can easily be fabricated and a high etching selective ratio is realized with respect to the insulating film 2, there is no apprehension that borderless etching continues during anisotropic RIE for removing the polysilane in the contact hole 5, as shown in FIG. 2B.

Then, as shown in FIG. 2C, O_2 ashing is performed to remove the resist 7 and oxidation of the polysilane 6 are simultaneously be performed. Then, the wiring metal is buried and smoothing is performed so that dual-damascene structure free of excessive borderless etching is formed.

The organic silicon having the main chains that are the bondings of silicon and silicon cannot be employed as the material of the interlayer insulating film as it is. If O_2 is introduced into the material by using a method such as O_2 ashing, the organic silicon such as polysilane is changed to an insulating material near SiO_2 from electrical and mechanical viewpoints. Therefore, the changed material can be

used to form a required interlayer insulating film.

The first embodiment is effective as a method of manufacturing a mixed memory logic LSI incorporating a DRAM section and a logic section as mounted on one chip. Since the alignment margin in the logic section is smaller than that in the memory section as described above, borderless etching easily occurs in the logic section. When the structure according to the first embodiment is employed, the mixed memory logic LSI can be manufactured with a high manufacturing yield.

<Second embodiment>

Referring to FIGS. 3A, 3B, 4A and 4B, a second embodiment of the present invention will now be described. As shown in FIG. 3A, a trench metallization in the first layer is formed in the insulating film 2. The silicon nitride film 4 is used as a stopper to perform a smoothing step, and the overall surface is coated with the polysilane 6. The resist 7 and the anisotropic RIE are employed to form the contact hole 5 in the polysilane 6. Then, the resist 7 is removed by performing O_2 ashing. Simultaneously, the polysilane 6 is changed to the insulating film 2 constituted by the silicon oxide film. Thus, the shape of the insulating film 2 shown in FIG. 1B according to the first embodiment is formed. The foregoing insulating film 2 is used to

perform the steps following the step shown in FIG. 1.

A situation is shown in FIGS. 4A AND 4B in which misalignment has occurred when the resist mask 7 for the contact hole 5 is formed by the method according to the second embodiment. In the second embodiment, the contact hole 5 is formed in the polysilane 6 if the misalignment shown in FIG. 4A occurs. Therefore, a satisfactorily high etching selective ratio can be realized with respect to the insulating film 2. Thus, the insulating film 2 serves as the etching stopper so that the controllability of the anisotropic RIE is improved. As a result, borderless etching can be prevented.

Then, as shown in FIG. 4B, the O_2 ashing step is performed to remove the resist 7. Simultaneously, the polysilane 6 is changed to the silicon oxide film to make the silicon oxide film to be a portion of the insulating film 2. Then, the silicon nitride film 4 covering the upper portion of the silicon nitride film 4 is removed. As a result, the steps for forming the dual-damascene structure following the step shown in FIG. 2C according to the first embodiment can be employed.

FIG. 4B shows a characteristic that any borderless etching as shown in FIG. 2C does not occur. Although the area of connection between the wiring metal for burying the contact hole 5 and the wiring

metal 3 in the first layer is reduced, the defective wiring due to borderless etching can significantly be prevented.

When the structure according to the second embodiment is employed, the deterioration in the manufacturing yield of the logic section of the mixed memory logic LSI owing to the borderless etching can be significantly suppressed.

Although the second embodiment has been described as a method of forming the contact hole 5 having the dual-damascene structure, the present invention is not limited to the foregoing description. The structure may be applied to formation of a contact hole having a usual multilayered metallization.

<Third embodiment>

Referring to FIGS. 5A to 5D, a third embodiment of the present invention will now be described. The third embodiment is different from the second embodiment in the insulating film 2 shown in FIG. 3A is constituted by polysilane 6.

As shown in FIG. 5A, the silicon substrate 1 is coated with the polysilane 6. Since the silicon substrate 1 has been subjected to a wafer process, a variety of elements of the semiconductor device have been mounted. Therefore, the surface of the silicon substrate 1 usually has complicated step differences.

Since the polysilane 6 flows, the step

differences are buried by coating. Moreover, any
surface polishing is not required because the overall
surface of the wafer has satisfactory flatness to
permit execution of the dry etching process.

5   Then, the resist (not shown) is used as a mask to
perform the anisotropic RIE to form the first trench
in the polysilane 6. As described above, the
polysilane can easily be subjected to the anisotropic
RIE and the surface of the polysilane is flat.

10   Therefore, any etching stopper is not required to form
the first groove having uniform depths, and from a
viewpoint of practical use can be formed by only
controlling the conditions of the RIE process.

     The step of covering the wiring metal 3, the step
15   of burying the silicon nitride film 4 and the step of
removing excess wiring metal and silicon nitride film
left on the polysilane 6 are combined so that the
first trench metallization shown in FIG. 5A is formed.

     As shown in FIG. 5A, the polysilane 6 is changed
20   to the silicon oxide film in the step of removing the
resist (not shown) for use to form the first trench by
O_2 ashing. To describe the difference from the second
embodiment, the silicon oxide film is illustrated as
the polysilane 6.

25   Then, as shown in FIG. 5B, the wiring metal 3
covered with the insulating film 2 constituted by the
silicon oxide film and the silicon nitride film 4 is

coated with the polysilane 6. Then, the pattern of
the resist 7 is formed to align the opening position
of the contact hole.

Then, as shown in FIG. 5C, the resist 7 is used
as a mask to form the contact hole 5, which reaches
the silicon nitride film 4, in the polysilane 6. The
resist 7 is removed by O_2 ashing. Simultaneously, the
polysilane 6 is changed to the insulating film 2
constituted by the silicon oxide film. Moreover, the
silicon nitride film 4 on the wiring metal 3 is
removed. Thus, as shown in FIG. 5D, all of the
structures of the insulating film 2 shown in FIG. 3B
according to the second embodiment can be formed by
using polysilane 6 as the material.

Since the polysilane 6 changed to the insulating
film 2 has material properties similar to those of the
integrated insulating film 2, the manufacturing
process following the process shown in FIG. 1C
according to the first embodiment can be employed.

The merit of the third embodiment obtainable from
formation of the first trench metallization shown in
FIG. 5A with polysilane lies in that a flat surface
constituted by the polysilane can be obtained if the
surface of the silicon substrate 1 has step
differences. The conventional method with which the
insulating film 2 is deposited cannot prevent
formation of a stepped portion also on the surface of

the insulating film 2. Therefore, the first trench having a uniform width and depth cannot be formed.

When the insulating film 2 is deposited thick and the surface is smoothed by performing CMP, the shape

5   of the first trench can be improved. However, the problem of uneven density of the stoppers for use in the polishing step remains to be solved. Therefore, the overall surface of the wafer cannot easily be smoothed in ordinary cases. When the polysilane 6 is

10 applied, the foregoing problem can considerably be easily prevented. As a matter of course, the third embodiment attains a similar resilt of preventing borderless etching to that obtainable from the second embodiment.

15   <Fourth embodiment>

A fourth embodiment of the present invention will now be described with reference to FIGS. 6A to 6I. Hitherto, formation of a contact hole having a high aspect ratio or formation of a trench encounters film

20 thinning of the resist that is used as the mask for the anisotropic RIE step. As a result, there arises a problem where the thickness of the residual film of the resist to serve as the mask is excessively reduced.

25   To prevent the foregoing problem, a method may be employed which has the steps of: forming a reversed pattern of the opening portion of the contact hole;

changing the surface of the polysilane existing in the outer portion of the exposed opening portion to the insulating film constituted by the silicon oxide film by performing O_2 RIE or implantation of O_2 ions, and

5 opening the polysilane by using the insulating film as a mask. Thus, a satisfactory contact hole and the trench can be formed.

That is, as shown in FIG. 6A, the surface of the first trench metallization constituted by the

10 insulating film 2 on the silicon substrate 1 and the wiring metal 3 covered with the silicon nitride film 4 is coated with the polysilane 6. Then, the pattern of the resist 7 is formed to cover the portion in which the contact hole will be formed.

15 Then, the resist 7 is used as a mask to introduce O_2 ions into the surface of the polysilane 6 by using an O_2 RIE machine as indicated with an arrow shown in FIG. 6A. Then, O_2 ashing is performed to remove the resist 7. Thus, as shown in FIG. 6B, the insulating

20 film 2 constituted by the silicon oxide film is formed on the surface of the polysilane 6. The ashing of the resist 7 is performed minimally to prevent change of the surface of the polysilane 6 covered with the lower portion of the resist 7 to the silicon oxide film.

25 Since the etching selective ratio of the polysilane 6 with respect to the insulating film 2 can be raised as described above, the resist 7 is removed

and the anisotropic RIE step is performed by using the insulating film 2 as a mask as shown in FIG. 6C. Thus, the contact hole 5 can be formed in the polysilane 6 by using the silicon nitride film 4 as

5 the etching stopper.

Then, treatment similar to the O_2 ashing step is performed in the same chamber in which RIE has been performed so that O_2 ions are introduced from the inner surface of the contact hole 5 opened in the

10 polysilane 6. As a result, the overall body of the polysilane 6 can be changed to the insulating film constituted by the silicon oxide film.

Thus, as shown in FIG. 6D, both of the insulating film 2 for use to form the first trench and the

15 insulating film for performing formation of the contact hole 5 and used as the etching mask can be formed as the integrated insulating film 2 constituted by the silicon oxide film.

At this time, the edge of the periphery of the

20 opening portion of the insulating film 2a used as the mask is rounded by the anisotropic RIE. When rounding excessively occurs and raises a problem in the structure, removal of the insulating film 2a is required by CMP, as shown in FIG. 6D.

25 Note that attention must be focused on a fact that the rounded portion of the edge adjacent to the opening portion has an effect of smoothing the burying

step when the wiring metal is buried in the contact
hole and when the contact hole of the insulating film
2 shown in FIG. 6D has a high aspect ratio.

Then, as shown in FIG. 6E, the overall surface is
coated with the polysilane 6 such that the contact
hole is buried. Then, reversed patterning is
performed to cover the opening portion of the second
trench by using the resist 7. The resist 7 is used as
a mask to introduce oxygen into the surface of the
polysilane 6 by using the O_2 RIE machine.

Then, the steps shown in FIGS. 6B and 6C are
repeated as shown in FIGS. 6F and 6G so that a
treatment similar to the O_2 ashing is continuously
performed in the same chamber. The insulating film 2
completely constituted by the silicon oxide film and
having the dual-damascene structure can be formed on
the silicon substrate 1, as shown in FIG. 6H.

Then, as shown in FIG. 6I, the silicon nitride
film 4 on the upper portion of the wiring metal 3 is
removed, and the wiring metal is deposited to bury the
contact hole 5 and the second trench 8. The wiring
metal may be Al-Cu or Cu. Then, the wiring metal
removal portion 3a that has excessively been deposited
is removed by CMP by using the insulating film 2 as a
stopper. Thus, an excellent dual-damascene structure
having a shape that is precisely controlled can be
formed.

When the anisotropic RIE results in an excessive
rounded edge adjacent to the opening portion of the
insulating film that was used as the etching mask and
a problem in terms of the structure arises, the CMP
5   step is furthermore performed to remove the insulating
film removal portion 2a by polishing.

When the second trench 8 shown in FIG. 6H has a
high aspect ratio, attention must be focused on the
fact that the insulating film removal portion 2a
10   generated adjacent to the opening portion has the
effect of smoothing the burying step when the wiring
metal is buried in the second trench 8 as shown in
FIG. 6I.

<Fifth embodiment>
15   Referring to FIGS. 7A to 7C, a fifth embodiment
of the present invention will now be described.
Referring to FIG. 7A, the step until the overall
surface is coated with the polysilane 6 such that the
contact hole is buried is similar to that according to
20   the fourth embodiment shown in FIG. 6E.

In the fourth embodiment, the resist 7 is formed
by performing reversed patterning such that the
opening portion of the second trench 8 of the
polysilane 6 is covered. The fifth embodiment is
25   structured such that the overall surface is coated
with the polysilane 6. Then, the resist 7 is used to
open the formation position of the second trench 8 by

performing a usual patterning.

Since the insulating film 2 can be formed by using the polysilane 6 which can easily be fabricated, the film thinning of the resist mask can be reduced during the anisotropic RIE step. Therefore, as shown in FIG. 7B, the resist 7 can be used as the etching mask to perform the formation of the second trench 8 and remove the polysilane with which the contact hole 5 is filled.

As shown in FIG. 7C, the polysilane 6 is changed to the insulating film 2 constituted by the silicon oxide film simultaneously with the step of removing the resist 7 by O_2 ashing. Thus, the interlayer insulating film 2 having the dual-damascene structure on the silicon substrate 1 can be formed into the insulating film constituted by an integrated silicon oxide film.

Since the anisotropic RIE enables the rounded portion generated at the edge adjacent to the opening portion of the resist 7 to be removed together with the resist 7, the foregoing method has a merit when the rounded portion is undesirable as the processed shape. When the step of burying the material of the metallization shown in FIG. 1F is added to be performed successively, a dual-damascene structure can be formed.

In the first to fifth embodiments, the RIE using

the O_2 plasma or implantation of O_2 ions is employed
to form the insulating film constituted by the silicon
oxide film. The method is not limited to the
foregoing methods.

5   Alternatively, any one of the following methods
may be employed: thermal oxidation which is performed
in an O_2 atmosphere, ashing which uses O3 plasma,
irradiation with ultraviolet rays and dipping opening
portions into section in which sulfuric acid and
10   hydrogen peroxide are mixed. Also the method enables
polysilane to be changed to the insulating film
constituted by the silicon oxide film.

The organic silicon film such as polysilane, can
be changed to an insulating film in various stages
15   owing to the degree of oxidation which include: an
organic silicon oxide film in which carbon is left in
the oxide film, an inorganic silicon oxide film from
which carbon has been removed, that has a crystal
structure having irregularity as compared with SiO_2
20   and which contains OH groups, and a silicon oxide film
subjected to further heat treatment to have the
crystal structure similar to that of SiO_2.

For example, the trench metallization in the
first layer and the contact hole are formed by using
25   organic silicon oxide film. Then, organic silicon is
applied to form the second trench and ashing is
performed in a gas composed of only O_2. In this case,

carbon may be left in organic silicon by controlling
the temperature. Alternatively, heat treatment may be
performed in an atmosphere of mixed gas of O_2 and CO_2
to change the organic silicon constituting the second
5   trench to an organic silicon oxide film having a
dielectric constant similar to that of the organic
silicon oxide film.

When organic silicon film such as polysilane is
subjected to heat treatment that is performed in a
10   mixed gas atmosphere of O_2 and CO_2, or when the
organic silicon is subjected to RIE using CO, or when
implantation of CO ions is performed, the organic
silicon oxide film having a dielectric constant
similar to that of the organic silicon oxide film can
15   be formed.

When organic silicon film such as polysilane is
subjected to ashing using a gas containing only H_2 or
a mixed gas of H_2 and O_2 when RIE, implantation of
ions, or heat treatment is performed, the inorganic
20   silicon oxide film can be formed.

When the organic silicon such as polysilane is
subjected heat treatment in a mixed gas atmosphere of
N_2 and O_2 or when ashing, RIE, or implantation of ions
is performed by using the foregoing gas, the silicon
25   oxide nitride film or a silicon nitride film can be
formed.

The silicon oxide film, the silicon oxide nitride

film and silicon nitride film may be employed to a dry
etching process of the contact hole and the trench
according to the present invention.

    <Sixth embodiment>

5   Referring to FIGS. 8A to 8C, a sixth embodiment
of the present invention will now be described. As
shown in FIG. 8A, the sixth embodiment is structured
such that formation of the interlayer insulating film
having the dual-damascene structure is performed by

10   using an organic silicon oxide film 2b until the step
of formation of the trench metallization in the first
layer and the contact hole. Since the organic silicon
oxide film 2b is formed by a method similar to that at
the third embodiment described with reference to

15   FIGS. 5A to 5D, a detailed description of the method
is omitted.

    As shown in FIG. 8A, the surface of the organic
silicon oxide film 2b is coated with the polysilane 6
to bury the contact hole. The resist 7 is used to

20   open the portion in which the second trench will be
formed. Then, as shown in FIG. 8B, the resist 7 is
used as the etching mask to perform anisotropic RIE so
as to form the second trench 8 in the polysilane 6.
Then, the polysilane 6 with which the contact hole 5

25   is filled is removed until the silicon nitride film 4
is exposed to the outside.

    Then, as shown in FIG. 8, ashing is performed by

using a mixed gas of O_2 and CO_2 to remove the resist
7. Simultaneously, change is caused to occur such
that the polysilane 6 has a dielectric constant that
is the same as the organic silicon oxide film 2b so as
5   to be a portion of the organic silicon oxide film 2b.
Thus, an interlayer insulating film having the dual-
damascene structure, the overall body of which is made
of the organic silicon oxide film, can be formed.

      <Seventh embodiment>

10   Referring to FIGS. 9A to 9C, a seventh embodiment
of the present invention will now be described. In
the seventh embodiment, the overall body of the
interlayer insulating film having the dual-damascene
structure is formed by using the organic silicon oxide
15   film 2b such that the polysilane 6a serving as the
etching stopper for forming the second trench is
buried.

      As shown in FIG. 9A, an opening portion is
previously formed in the etching stopper constituted
20   by the polysilane 6a so as to also be used as the
etching mask for forming the contact hole. Moreover,
the surface of the organic silicon oxide film 2b is
coated with the polysilane 6 as the anti-reflective
film. The resist 7 is used to form the opening
25   portion in the region in which the second trench will
be formed.

      Then, as shown in FIG. 9B, RIE is performed to

remove the anti-reflective film constituted by the polysilane 6. Then, the RIE conditions for the organic silicon oxide film 2b are employed to perform anisotropic etching to reach the silicon nitride film

5   4. Thus, only one RIE operation enables the contact hole 5 and the second trench 8 to be formed.

At this time, the anisotropic etching is performed under the RIE conditions that the flow ratio of mixed gas $C_4F_8/CO/Ar/O_2$ is 10/50/200/8 sccm, the

10   pressure is 40 mTorr, the high frequency electric power of 1400 W is applied. Thus, the etching selective ratio of the polysilane 6 with respect to the organic silicon oxide film can be made to be 10 or higher. Therefore, the polysilane 6 can be used as

15   the etching mask for the contact hole 5 and the etching stopper when the second trench 8 is formed.

Then, as shown in FIG. 9C, the silicon nitride film 4 covering the upper portion of the wiring metal 3 is removed, and then a mixed gas of O_2 and CO_2 is

20   used to perform ashing so that the resist 7 is removed. Simultaneously, the polysilane 6 and polysilane 6a are changed to have the same dielectric constant as that of the organic silicon oxide film 2b as the portion of the organic silicon oxide film 2b.

25   Thus, the interlayer insulating film having the dual-damascene structure, the overall body of which is made of the integrated organic silicon oxide film, can be

formed.

In the seventh embodiment, the organic silicon oxide film 2b must be formed to bury the polysilane 6a. That is, oxidation of the polysilane 6a during the process for forming the organic silicon oxide film 2b must be prevented. To prevent oxidation of the polysilane 6a, for example, a method may be employed where an intermediate process is performed such that the surface of the polysilane 6a is covered with a thin plasma SiO_2 film and a barrier against introduction of O_2 is formed.

The thin SiO_2 film is removed from the surface of the polysilane 6a in the step show in FIG. 9B. Therefore, change of the polysilane 6a to a portion of the organic silicon oxide film in the step shown in FIG. 9C is not obstructed.

In the seventh embodiment, the material of the interlayer insulating film is organic silicon oxide film. Note that the material is not limited to the organic silicon oxide film. When the inorganic silicon oxide film or silicon oxide film is employed as the material of the interlayer insulating film, the polysilane 6a is similarly employed as the etching stopper and the etching mask.

At this time, polysilane is employed as the anti-reflective film 6. Note that the material is not limited to polysilane. For example, an organic

anti-reflective film may be employed. When the
organic anti-reflective film is employed, the anti-
reflective film can also be removed when the resist 7
is removed by ashing.

5   <Eighth embodiment>

Referring to FIGS. 10A to 10C, an eighth
embodiment of the present invention will now be
described. In the eighth embodiment, the polysilane
is changed to the silicon nitride film so as to be

10   used as a mask when a contact hole having a high
aspect ratio is formed.

As shown in FIG. 10A, the trench metallization in
the first layer is formed by using the insulating film
2. Then, the insulating film 2 is again deposited on

15   the first trench metallization to bury the first
trench metallization with the thick insulating film 2
so that the surface is smoothed. Then, the polysilane
6 is applied, and then the pattern of the resist 7 for
forming the opening portion of the contact hole having
the high aspect ratio is formed. The polysilane 6 is

20   an anti-reflective film in an exposing step in the
lithography process for opening the resist 7.

Then, the resist 7 is used as the etching mask
when the contact hole 5 is formed in the insulating

25   film 2 by anisotropic RIE. Thus, the silicon nitride
film 4 covering the wiring metal 3 is exposed to the
outside. At this time, the silicon nitride film 4

serves as a stopper for use in the anisotropic RIE step.

Then, as shown in FIG. 10B, the resist 7 is removed by N_2 ashing. Simultaneously, the anti-reflective film constituted by the polysilane 6 is changed to the silicon nitride film 4. The silicon nitride film 4 and the silicon nitride film 4 covering the wiring metal 3 are removed by hot phosphoric acid etching or by CDE (Chemical Dry Etching). Thus, as shown in FIG. 10C, the contact hole 5 having a high aspect ratio reaches the wiring metal 3 and the first layer can be formed.

The eight embodiment is characterized in that the anti-reflective film constituted by the polysilane 6, which is left on the surface and which cannot therefore easily be removed by the O_2 ashing for removing the resist 7, is changed to the silicon nitride film simultaneously with removal of the resist 7 by performing N_2 ashing. Thus, the removal can easily be performed by wet etching or the CDE.

<Ninth embodiment>

Referring to FIGS. 11A to 11C, a ninth embodiment of the present invention will now be described. The ninth embodiment is a modification of the eighth embodiment, in which a contact hole having a high aspect ratio is formed to directly reach the silicon substrate 1.

As shown in FIG. 11A, a thick insulating film 2
is directly formed on the silicon substrate 1. Then,
an anti-reflective film constituted by the polysilane
6 is applied. Then, the pattern of a resist 7 having
5   an opening portion of the contact hole is formed on
the anti-reflective film.

The resist 7 is used as the etching mask to
perform anisotropic RIE to form the contact hole 5
that reaches the surface of the silicon substrate 1.
10   Then, as shown in FIG. 11B, N_2 ashing is performed to
remove the resist 7. Simultaneously, the anti-
reflective film constituted by the polysilane 6 is
changed to the silicon nitride film 4.

The anti-reflective film changed to the silicon
15   nitride film 4 is removed by a hot phosphoric acid
treatment. Thus, the contact hole having a high
aspect ratio which reaches the surface of the silicon
substrate shown in FIG. 11C can be formed.

<Tenth embodiment>
20   Referring to FIGS. 12A and 12B, a tenth
embodiment of the present invention will now be
described. The tenth embodiment is different from the
eighth embodiment in that the anti-reflective film
constituted by the polysilane 6 is made to be a
25   portion of the insulating film 2 after the contact
hole 5 has been formed.

As shown in FIG. 12A, a thick insulating film 2

is directly formed on the silicon substrate 1. Then, the anti-reflective film constituted by the polysilane 6 is applied. Then, the pattern of the resist 7 having an opening portion of the contact hole is

5   formed on the anti-reflective film.

The resist 7 is used as the etching mask to perform anisotropic RIE to open the contact hole 5 that reaches the surface of the silicon substrate 1. Then, as shown in FIG. 12B, O_2 ashing is performed to

10   remove the resist 7. Simultaneously, the polysilane 6 is changed to the silicon oxide film. Thus, the anti-reflective film can be formed to be a portion of the insulating film 2.

In the tenth embodiment, the insulating film 2 that is first formed on the silicon substrate 1 is the

15   insulating film obtained by oxidizing the polysilane. Thus, the contact hole which reaches the silicon substrate 1 as shown in FIG. 12B can be formed as the insulating film constituted by an integrated silicon

20   oxide film including the anti-reflective film.

When a silicon nitride film changed from the polysilane is employed as the insulating film 2 which is formed on the silicon substrate 1 and the resist 7 is removed by N_2 ashing, the polysilane 6 employed as

25   the anti-reflective film is changed to the silicon nitride film. Therefore, the contact hole can be formed as the insulating film constituted by the

integrated silicon nitride film including the anti-
reflective film.

Although the tenth embodiment has been described
about formation of the contact hole that reaches the
5   silicon substrate 1, the contact hole for the trench
metallization in the first layer can be formed by a
similar process.

<Eleventh embodiment>

Referring to FIGS. 13A to 13C, an eleventh
10   embodiment of the present invention will now be
described. As shown in FIG. 13A, the thick insulating
film 2 is formed on the silicon substrate 1. Then, an
anti-reflective film constituted by the polysilane 6
is applied. Then, the pattern of the resist 7 having
15   the opening portion of the contact hole is formed.
Then, the resist 7 is used as a mask when the
anisotropic RIE is performed to open the polysilane 6.
Then, as shown in FIG. 13B, N_2 ashing is performed to
remove the resist 7. Simultaneously, the polysilane 6
20   is changed to the silicon nitride film.

Then, as shown in FIG. 13C, the silicon nitride
film 4 is used as the mask when the anisotropic RIE is
performed to form the contact hole having a high
aspect ratio which reaches the silicon substrate 1.

25   When a resist mask is directly used to form the
contact hole having the high aspect ratio by the
anisotropic RIE, the film thinning of the resist mask

occurs. On the other hand, the eleventh embodiment in which the silicon nitride film 4 is used as the mask when the anisotropic RIE is performed enables a high etching selective ratio to be realized with respect to

5 the insulating film 2 constituted by SiO_2 or the like. Therefore, the problem of the film thinning can be prevented.

The silicon nitride film 4 on the insulating film 2 shown in FIG. 13C may be removed by the hot

10 phosphoric acid. Alternatively, the insulating film 2 may be integrated with a portion of the insulating film 2 as a silicon nitride film changed from polysilane. The rounded portion formed adjacent to the opening portion of the silicon nitride film 4

15 enables the wiring metal to be smoothly buried in the contact hole 5.

<Twelfth embodiment>

Referring to FIGS. 14A to 14C, a twelfth embodiment of the present invention will now be

20 described. As shown in FIG. 14A, the insulating film 2 constituted by the thick silicon oxide film is formed on the silicon substrate 1. Then, the anti-reflective film constituted by the polysilane 6 is applied to the surface of the insulating film 2. The

25 resist 7 is used to form a reversed pattern of the resist 7 such that the opening portion of the contact hole is covered. Then, RIE using N_2 is performed to

change the exposed surface of the silicon nitride film
4, and then the resist 7 is removed.

Then, as shown in FIG. 14B, the silicon nitride
film 4 is used as a mask to perform the anisotropic
5   RIE to open the contact hole, which reaches the
silicon substrate 1, in the insulating film 2
constituted by the polysilane 6 and the silicon oxide
film.

Then, a treatment similar to the O_2 ashing step
10   is performed to change the polysilane 6 to the silicon
oxide film. Thus, the polysilane 6 is integrated as a
portion of the insulating film 2, as shown in
FIG. 14C.

Then, hot phosphoric acid is used to remove the
15   silicon nitride film 4 employed as the mask so that a
contact hole having a high aspect ratio which reaches
the silicon substrate 1 is formed in the insulating
film 2 constituted by the silicon oxide film. Also
the twelfth embodiment employs the silicon nitride
20   film as the etching mask for forming the contact hole
having the high aspect ratio. Therefore, the problem
of the film thinning can be prevented.

<Thirteenth embodiment>

Referring to FIGS. 15A to 15C, a thirteenth
25   embodiment of the present invention will now be
described. As shown in FIG. 15A, a thick organic
silicon oxide film 2b is formed on the silicon

substrate 1. Then, the anti-reflective film
constituted by the polysilane 6 and the resist 7
having an opened portion for forming the contact hole
5 are provided. Then, the resist 7 is used as the
mask when the anisotropic RIE is performed to form the
contact hole which reaches the silicon substrate 1.
Then, as shown in FIG. 15B, O_2 ashing is performed to
remove the resist 7.

In the O_2 ashing step, the polysilane 6 is
changed to the insulating film 2 constituted by the
silicon oxide film. At this time, only the insulating
film 2 constituted by the silicon oxide film changed
from the polysilane 6 can easily be removed by using
dilute hydrofluoric acid as shown in FIG. 15C because
the portion between the organic silicon oxide film 2b
and the insulating film 2 constituted by the silicon
oxide film has etching selectivity with respect to
dilute hydrofluoric acid.

In the eleventh to thirteenth embodiments, the
contact hole that reaches the silicon substrate 1 is
formed. As a matter of course, the contact hole for
the trench metallization in the first layer can
similarly be formed.

In the first to thirteenth embodiment, the method
has mainly been described in which the organic silicon
film is employed in the interlayer insulating film
having the dual-damascene structure and the fabricated

portion of the contact hole. The present invention is
not limited to this. The organic silicon film such as
polysilane, can widely be applied to a manufacturing
method of semiconductor devices by using dry etching
5   technology. The foregoing facts will now be described
as the following embodiments.

<Fourteenth embodiment>

Referring to FIGS. 16A to 16E, a fourteenth
embodiment will now be described. The fourteenth
10   embodiment is structured such that the device
isolation region and the device region are smoothed by
using polysilane.

As shown in FIG. 16A, the silicon substrate 1 is
coated with the polysilane 6 to form the pattern of
15   the resist 7 such that the device region for forming a
MOS (Metal-Oxide-Semiconductor) transistor is covered.
Then, a mixed gas of Cl_2, the flow rate of which is
75 sccm, and O_2, the flow rate of which is 10 sccm is
used to perform anisotropic RIE by using the resist 7
20   as a mask as shown in FIG. 16B under conditions that
the pressure is 75 mTorr and the high frequency
electric power is 300 W. Thus, the polysilane 6 and
the silicon substrate 1 are etched.

Then, as shown in FIG. 16C, N_2 ashing is
25   performed to remove the resist 7. Simultaneously, the
polysilane 6 is changed to the silicon nitride film 4.
Then, as shown in FIG. 16D, the overall surface is

coated with the polysilane 6 such that the isolation
trench for isolating devices formed in the silicon
substrate 1 is buried.

　　　Since the polysilane 6 flows, the surface of the
5   polysilane 6 is smoothed owing to the coating.
Moreover, CMP is performed to remove the excess
polysilane 6 on the silicon nitride film 4 by using
the silicon nitride film 4 as the stopper. Thus, the
opening portion of the isolation trench is filled with
10   the polysilane 6 so as to be smoothed.

　　　Then, as shown in FIG. 16E, a treatment similar
to O_2 ashing is performed so that the polysilane 6
with which the isolation trench is filled is changed
to the insulating film 2 constituted by the silicon
15   oxide film. Although the foregoing embodiment has the
structure that the polysilane is employed to bury the
isolation trench, the present invention is not limited
to this. Also an organic silicon oxide film or an
inorganic silicon oxide film which can be formed by
20   coating can be used to bury the isolation trench.

　　　As described before, the conventional step of
forming the isolation trench has been performed by
thick deposition of the insulating film constituted by
SiO_2 which cannot easily be processed as compared with
25   polysilane. Then, the surface of the insulating film
having a great uneven surface along the isolation
trench is smoothed by CMP by using the silicon nitride

film constituted by Si_3N_4 as the stopper. Therefore, a problem arises according to the distribution of density of the device regions covered with the stoppers. That is, polishing proceeds excessively in a field region where stoppers are distributed at a low density and thus the surface is formed into a concave shape.

On the other hand, the fourteenth embodiment has the structure that polysilane which can easily be polished is applied as a substitute for SiO_2. Therefore, the surface can be smoothed from the initial stage. Since only polysilane in the form of a thin film left on the silicon nitride film in a small quantity is required to be removed by CMP, the surface smoothness realized after CMP has been completed can be considerably improved as compared with the conventional method.

<Fifteenth embodiment>

Referring to FIGS. 17A to 17D, a fifteenth embodiment of the present invention will now be described. The fifteenth embodiment has the structure that the polysilane according to the present invention is employed in a portion which is formed between gate electrodes of a MOS transistor formed on the silicon substrate 1 and in which dry etching of SAC is performed to form the contact hole which reaches the source/drain diffusion layer 9 in a self-alignment

manner.

As shown in FIG. 17A, a gate oxide film 10 is formed on the silicon substrate 1 on which the source/drain diffusion layer 9 of the MOS transistor is formed. Then, polysilicon 11, tungsten 12 and the silicon nitride film 4 are stacked on the gate oxide film 10. Then, a pattern is formed so that the gate electrode of the MOS transistor is formed such that the portion around the gate electrode is covered with the silicon nitride film 4.

Then, the insulating film 2 made of, for example, SiO_2 is deposited on the overall surface of the silicon substrate 1 on which the gate electrode has been formed. Then, CMP is performed to smooth the surface of the insulating film 2. Then, polysilane 6 is further applied to the smoothed insulating film 2, and then the pattern of resist 7 is formed having an opening portion in which a self-aligned contact hole will be formed.

Then, as shown in FIG. 17B, polysilane 6 serving as a mask is opened by anisotropic RIE. Then, as shown in FIG. 17C, the self-aligned contact hole 13 is formed by anisotropic RIE to reach the etching stopper constituted by the silicon nitride film 4 which covers the portion around the gate electrode.

At this time, the etching selective ratio of the silicon nitride film 4 covering the portion around the

gate electrode with respect to the insulating film 2 is lowered in the edge line portion of the gate electrode exposed to the inside portion of the self-aligned contact hole 13. Therefore, the corner

5   of the edge line portion of the silicon nitride film 4 is, as shown in FIG. 17C, cut owing to the anisotropic RIE of the self-aligned contact hole 13.

Since cutting of the corners of the gate electrode is protected by the silicon nitride film 4

10 in the uppermost layer of the gate electrode, there arises no problem when the depth of etching of the insulating film 2, which cannot easily be fabricated as compared with the polysilane 6, is small.

That is, the fifteenth embodiment has the

15 structure that the thickness of the insulating film 2 is reduced to stack the polysilane 6 on the insulating film 2. Thus, the depth of etching of the insulating film 2 can be minimized until the edge line portion of the gate electrode is exposed.

20   In the fifteenth embodiment, as shown in FIG. 17D, O_2 ashing is performed to remove the resist 7. Simultaneously, the polysilane 6 is changed to be the silicon oxide film which forms a portion of the insulating film 2. Then, the silicon nitride film 4

25 and the gate oxide film 10 covering the source/drain diffusion layer 9 are removed. Then, wiring metal is buried in the self-aligned contact hole 13. Thus, a

SAC connected to the source/drain diffusion layer 9 is formed.

When the thickness of the insulating film 2 shown in FIG. 17A is enlarged to the total thickness of the insulating film 2 and the polysilane 6 as employed by the conventional technology, further intense anisotropic RIE is required to etch the insulating film 2 as compared with the anisotropic RIE required to etch the polysilane 6. Therefore, the amount of cutting of the edge line portion of the gate electrode is enlarged. If tungsten 12 of the gate electrode is exposed, the gate electrode and the source/drain diffusion layer 9 are short-circuited in the step of burying the wiring metal in the self-aligned contact hole 13.

That is, the fifteenth embodiment is characterized in that the insulating film 2 and the polysilane 6 are stacked; and the polysilane 6 is changed to be a portion of the insulating film 2 to substantially reduce the amount of fabrication of the insulating film 2 by the anisotropic RIE so as to prevent short circuit between the gate electrode and the source/drain diffusion layer 9 so that the manufacturing yield of the semiconductor devices is improved.

<Sixteenth embodiment>

Referring to FIGS. 18A to 18E, a sixteenth

embodiment of the present invention will now be described. As shown in FIG. 18A, a gate oxide film 10 is formed on the silicon substrate 1 having the source/drain diffusion layer 9. The pattern of a gate electrode having the laminated polysilicon 11, tungsten 12 and the silicon nitride film 4 is formed. Then, the portion around the gate electrode is coated with the silicon nitride film 4. The foregoing steps are the same as those shown in FIG. 17A.

Then, as shown in FIG. 18B, the surface of the silicon nitride film 4 covering the gate electrode is covered with a silicon oxide film 10a. Then, the polysilane 6 is applied thickly to the overall upper surface of the silicon substrate 1 subjected to the foregoing step. The sixteen embodiment is characterized in that the insulating film in which the gate electrode is buried is substantially constituted by the polysilane 6.

The pattern of the opening portion in the resist 7 is formed at the position at which the self-aligned contact hole 13 will be formed. The resist 7 is used as a mask to open the self-aligned contact hole 13 in the thick polysilane film 6. Since the polysilane 6 can easily be removed by anisotropic RIE, the silicon oxide film 10a covering the gate electrode serves as a stopper to completely prevent erosion of the edge line portion of the gate electrode and improve the

manufacturing yield of the semiconductor devices.

Then, as shown in FIG. 18C, the polysilane 6 is changed to the silicon oxide film simultaneously with removal of the resist 7 by performing O_2 ashing.

Then, as shown in FIG. 18D, the silicon oxide film 10a covering the gate electrode is removed by etching. For maximum prevention of erosion of the edge line portion of the silicon nitride film 4 covering the gate electrode, the silicon oxide film is etched under RIE conditions where the selective ratio with respect to the silicon nitride film can be raised. Since a satisfactory high etching selective ratio can be realized between the insulating film 2 changed from the polysilane 6 and the silicon oxide film 10a covering the gate electrode, only the silicon oxide film 10a can be removed by etching.

Then, as shown in FIG. 18E, anisotropic RIE is performed to remove the silicon nitride film 4 covering the source/drain diffusion layer 9 and the gate oxide film 10. At this time, the silicon nitride film 4 covering the edge line portion of the gate electrode is somewhat eroded. Since the amount of dry etching is very small, there is no apprehension that a short circuit will occur between the gate electrode and the source/drain diffusion layer 9.

<Seventeenth embodiment>

Referring to FIGS. 19A to 19D, a seventeenth

embodiment of the present invention will now be
described. The seventeenth embodiment is a
modification of the sixteenth embodiment. As shown in
FIG. 19A, the gate electrode on the silicon substrate
1 subjected to the step shown in FIG. 18A is covered
with a thicker oxide film 10b. As shown in FIG. 19B,
anisotropic RIE is performed to carry out etching back
so that an oxide film 10b of the gate sidewall is
formed.

Then, as shown in FIG. 19C, a thick polysilane 6
is applied to form the pattern of the resist 7 having
an opening corresponding to the self-aligned contact
that will be established. The resist 7 is used as a
mask when the anisotropic RIE is performed to form the
self-aligned contact hole 13 in the polysilane 6.
Since the oxide film 10b of the gate sidewall serves
as an etching stopper in the anisotropic RIE step of
the polysilane, erosion of the edge line portion of
the gate electrode can be prevented.

Then, O_2 ashing is performed to remove the resist
7. Simultaneously, the polysilane 6 is changed to the
insulating film 2 constituted by the silicon oxide
film. The following steps similar to the steps
following the step shown in FIG. 18C are performed so
that a SAC connected to the source/drain diffusion
layer 9 is formed.

A step has been described with which the thick

oxide film 10b covering the gate is etched back to be
the oxide film 10b of the gate sidewall shown in
FIG. 19B. The etching back is not always required.
If the etching conditions are optimized, a similar

5   effect can be obtained when the thick oxide film 10b
is employed as it is.

       <Eighteenth embodiment>

       Referring to FIGS. 20A to 20C, an eighteenth
embodiment of the present invention will now be

10   described. In the eighteenth embodiment, polysilane
is used to form the trench. As shown in FIG. 20A, the
insulating film 2 constituted by the silicon oxide
film is formed on the silicon substrate 1. Then, the
surface of the insulating film 2 is coated with the

15   polysilane 6.

       The resist 7 is opened at the position on the
polysilane 6 at which the metallization trench will be
formed. The resist 7 is used as a mask to form the
trench 8 by performing anisotropic RIE, as shown in

20   FIG. 20B. Since the etching selective ratio of the
polysilane 6 with respect to the insulating film 2
constituted by the silicon oxide film is very high,
the insulating film 2 serves as the stopper in the
anisotropic RIE step. As a result, the depth of the

25   second trench 8 can be uniformed.

       Then, as shown in FIG. 20C, O_2 ashing is
performed to remove the resist 7. Simultaneously, the

polysilane 6 is changed to a portion of the insulating
film 2 constituted by the silicon oxide film. As
described above, the polysilane 6 can be smoothed by
coating. If the anisotropic RIE conditions are
5   controlled, the etching stopper constituted by the
insulating film 2 is not always required to form the
trench 8 in the polysilane 6.

In general, a furthermore precise trench
metallization in the first layer is required. If an
10 aspect ratio (the ratio of the width of the
metallization and the height of the same) higher than
a predetermined value is required, a further
satisfactory result can be realized when the
insulating film 2 is employed as the etching stopper
15 as described in the eighteenth embodiment.

Although the eighteenth embodiment has the
structure that the silicon oxide film is employed as
the etching stopper, a similar effect can be obtained
when an organic silicon oxide film or an inorganic
20 silicon oxide film is employed. When the type of the
polysilane 6 is selected to correspond to the base
material, a furthermore satisfactory result can be
obtained.

<Nineteenth embodiment>

25 Referring to FIGS. 21A to 21E, a nineteenth
embodiment of the present invention will now be
described. In the nineteenth embodiment, a method of

forming an opening portion in the insulating film mask having a high aspect ratio for use to form a deep silicon trench in the silicon substrate will now be described.

5   As shown in FIG. 21A, a thermal oxide film 10 serving as an etching stopper is formed on the silicon substrate 1. Then, the polysilane 6 which is a lower layer is formed on the thermal oxide film 10. Then, an insulating film 2 constituted by, for example, a

10   silicon oxide film, is deposited on the polysilane 6 which is the lower layer. Then, the polysilane 6a which is an upper layer and which serves as an etching stopper is again applied. Thus, a reversed pattern of the resist 7 is formed to cover the position at which

15   the deep trench will be formed. The resist 7 is used as a mask when N_2 RIE or implantation of N_2 ions is performed so that the exposed surface of the polysilane 6a, which is the upper layer, is changed to the silicon nitride film 4a.

20   After the resist 7 has been removed, the silicon nitride film 4a is used as a mask when anisotropic RIE is performed under conditions that the flow rate ratio of Cl_2/O_2 is 75/10 sccm, the pressure is 75 mTorr and the applied high frequency electric power is 300 W

25   with which the etching selective ratio of the polysilane is high with respect to the silicon nitride film. Thus, the polysilane 6a, which is the upper

layer and which serves as the anti-reflective film, is opened.

Then, anisotropic RIE of the silicon nitride film 4a is performed under conditions that the flow rate ratio of C_4F_8/CO/Ar is 10/50/200 sccm, the pressure is 40 mTorr and the applied high frequency electric power is 1400 W with which a high etching selective ratio of the insulating film 2 constituted by the silicon oxide film with respect to the silicon nitride film 4a can be realized. Thus, a trench 14a that reaches the lower polysilane 6 is formed, as shown in FIG. 21B.

Since a required etching selective ratio with respect to the polysilane 6 can be realized, the lower polysilane 6 serves as the etching stopper. Thus, the trench 14a can be formed with a satisfactory controllability.

Then, conditions under which a high etching selective ratio of the lower polysilane 6 with respect to the silicon nitride film 4a and the thermal oxide film 10 can be realized are employed to form the trench 14b such that the thermal oxide film 10 is used as an etching stopper, as shown in FIG. 21C.

Then, conditions under which a high etching selective ratio of the thermal oxide film 10 with respect to the silicon nitride film can be realized are employed to remove the thermal oxide film 10, as shown in FIG. 21D. At this time, the surface of the

silicon substrate 1 serves as a stopper to form the
trench 14c which reaches the surface of the silicon
with a satisfactory controllability.

Finally, as shown in FIG. 21E, heat treatment is
5   performed in a N_2 atmosphere to change the upper and
lower polysilane portions 6a and 6 into silicon
nitride films 4a and 4. Thus, a deep trench mask 14
can be formed in which a trench having a high aspect
ratio is formed in the insulating film 2 vertically
10   sandwiched by the silicon nitride films 4a and 4
through the silicon thermal oxide film 10. Note that
the final process may be performed before the thermal
oxide film 10 is removed. The upper silicon nitride
film 4a may be removed.

15   The method of forming the deep trench mask
according to the nineteenth embodiment is
characterized in that the process is controlled
several times by the etching stopper during the
anisotropic RIE step. The method enables the trench
20   process of the etching mask to a depth that has been
impossible to be performed with a satisfactory
accuracy using conventional technology.

As an alternative to the heat treatment that is
performed finally in the N_2 atmosphere, the continuous
25   process is performed under a condition in which N_2
radicals are increased by changing the anisotropic RIE
conditions to conditions so that the flow rate of N_2

is 100 sccm, the pressure is 150 mTorr, and the
applied high frequency electric power is 100 W. Thus,
the polysilane portions 6a and 6 are changed to the
silicon nitride films. In the foregoing case, the
number of processing steps can be reduced.

<Twentieth embodiment>

Referring to FIGS. 22A to 22C, a twentieth
embodiment of the present invention will now be
described. As shown in FIG. 22A, the thermal oxide
film 10 serving as the etching stopper is formed on
the silicon substrate 1. Then, the lower polysilane 6
is applied, and the insulating film 2 constituted by
the silicon oxide film is deposited. Then, the upper
polysilane 6a serving as the anti-reflective film is
applied so that the pattern of the resist 7 having an
opening corresponding to the portion in which the
trench will be formed is formed. Then, the resist 7
is used as the etching mask so that the upper
polysilane 6a which serves as the anti-reflective film
is opened.

Then, as shown in FIG. 22B, N_2 ashing is
performed to remove the resist 7. Simultaneously,
the upper polysilane 6a is changed to the silicon
nitride film 4a. The silicon nitride film 4a is used
as a mask when the anisotropic RIE step is performed
to form the trench 14a which reaches the lower
polysilane 6.

Then, as shown in FIG. 22C, the conditions under which the anisotropic RIE is performed are changed to form the trench 14b in the lower polysilane 6 such that the thermal oxide film 10 is used as the etching

5 stopper. Then, a process similar to the N_2 ashing is performed to change the lower polysilane 6 into the silicon nitride film. Finally, the thermal oxide film 10 is removed so that the deep trench mask which reaches the surface of the silicon substrate 1 is

10 formed. Note that the N_2 ashing step may be performed after the thermal oxide film 10 has been removed.

The step of changing the dry etching conditions according to the twentieth embodiment may be performed by the method according to the nineteenth embodiment.

15 Since each layer serves as the etching stopper, an etching mask exhibiting a satisfactory controllability and having a high aspect ratio can be formed similarly to the nineteenth embodiment.

<Twenty-first embodiment>

20 Referring to FIGS. 23A to 23C, a twenty-first embodiment will now be described. The twenty-first embodiment is structured such that the pattern of the gate electrode of the MOS transistor is formed on the silicon substrate 1 by using the polysilane 6.

25 As shown in FIG. 23A, a gate insulating film constituted by the thermal oxide film 10 is formed on the surface of the silicon substrate 1. Then, a film

composed of the polysilicon 11 and tungsten 12 is, as the material of the gate electrode, formed on the gate insulating film. Then, the overall surface of the film is coated with the polysilane 6. Then, the

5   pattern of the resist 7 is formed to cover the portion in which the gate electrode will be formed.

Then, as shown in FIG. 23B, the resist 7 is used as the etching mask when the anisotropic RIE step is performed so that the pattern of a laminated film

10   composed of the polysilicon 11, the tungsten 12 and the polysilane 6 is formed as the gate electrode.

Then, as shown in FIG. 23C, N_2 ashing is performed to remove the resist 7. Simultaneously, the polysilane 6, the pattern of which has been formed on

15   the uppermost layer of the gate electrode, is changed to the silicon nitride film 4. The gate electrode having the silicon nitride film 4 is used as the mask of the gate electrode to form the source/drain diffusion layer 9 in a self-aligned manner by

20   performing implantation of ions and hydrogen. As a result, a MOS transistor on the silicon substrate can be obtained. Note that the polysilicon 11 and the tungsten 12 of the gate electrode are converted to tungsten silicide because of the heat treatment.

25   The conventional technology requires two steps of processes with which the resist is used as a mask to form the pattern of the silicon nitride film and the

patterns of tungsten and polysilicon are formed by
using the silicon nitride film as the mask to form the
pattern of a laminated film composed of polysilicon,
tungsten and the silicon nitride film as the gate

5   electrode.

In the twenty-first embodiment, the conditions
under which the polysilane 6 is etched are such that
the flow rate ratio of Cl_2/O_2 is 75 sccm/10 sccm, the
pressure is 75 mTorr and the applied high frequency

10   electric power is 300 W. Under the foregoing
conditions, the patterns of the tungsten 12 and the
polysilicon 11 can be simultaneously formed. As a
result, the number of processing steps can be reduced
and the gate electrode can be fabricated with

15   satisfactory controllability. Note that the formation
of the tungsten silicide may be performed first to
simultaneously form the patterns of the polysilicon
layer and the tungsten silicide.

A semiconductor device according to each of

20   twenty-second to twenty-ninth embodiments of the
present invention and the manufacturing method thereof
will now be described. The semiconductor device in
each of these embodiments includes a wiring structure
having a small inter-wiring parasitic capacitance in

25   the single layer or multi-layered damascene
metallization. Particularly, these embodiments are
intended to demonstrate that the use of an interlayer

insulating film using an organic silicon compound as a raw material is effective for decreasing the inter-wiring parasitic capacitance.

<Twenty-second embodiment>

FIGS. 24A to 24M are cross sectional views collectively showing a method of manufacturing a semiconductor device according to a twenty-second embodiment of the present invention. In this embodiment, a magnetron RIE apparatus is used as an etching apparatus for performing the etching employed in the present invention. The specific construction of the magnetron RIE apparatus will be described herein later.

In the first step, a SiO_2 film 102 acting as an interlayer insulating film is formed on a silicon substrate 101 having semiconductor elements formed therein in a manner to form an integrated circuit, as shown in FIG. 24A. Then, a polysilicon film 103 is formed on the SiO_2 film 102 as a hard mask of the SiO_2 film 102. Further, an anti-reflection film 104 (e.g., a carbon film) is formed on the polysilicon film 103, followed by forming a resist pattern 105 on the anti-reflection film 104. As shown in the drawing, the resist pattern 105 includes a first open portion O1 corresponding to a first wiring trench and a second open portion O2 corresponding to a second contact hole.

In the next step, the anti-reflection film 104 and

the polysilicon film 103 are selectively etched with
the resist pattern 105 used as a mask so as to transfer
the resist pattern 105 onto these films 103 and 104, as
shown in FIG. 24B. The etching in this step is carried

5   out under, for example, the pressure of 75 mTorr, the
power supply of 300 W, and the flow ratio of the
etching gases Cl/O_2 of 75/10 sccm. Where the etching
is carried out under the conditions given above, the
etching selectivity ratio of the polysilicon film 103

10 relative to the SiO_2 film 102 is rendered very high,
i.e., about 100. Therefore, the SiO_2 film 102 acts as
an etching stopper and, thus, the SiO_2 film 102 is
prevented from being etched excessively.

In the next step, the resist pattern 105 and the

15 anti-reflection film 104 are removed as shown in
FIG. 24C. After removal of the resist pattern 105 and
the anti-reflection film 104, a resist film 106 is
formed in a thickness of about 700 nm on the entire
surface, followed by forming an SOG film 107 by a

20 coating method in a thickness of about 100 nm on the
resist film 106, as shown in FIG. 24D. Then, a resist
film is formed on the SOG film 107 in a thickness of
about 300 nm, followed by applying a light exposure and
development to the resist film so as to form a resist

25 pattern 108. In this case, the SOG film 107 performs
the function of an anti-reflection film in the light
exposure step. The resist pattern 108 includes a third

open portion O3 corresponding to the first contact hole
and a fourth open portion O4 corresponding to a second
wiring trench.

In the next step, the resist film 106 is
selectively etched with the resist pattern 108 and the
SOG film 107 used as a mask.

In this case, the SOG film 107 is etched with the
resist pattern 108 used as a mask. The etching in this
step is carried out under, for example, the pressure of
20 mTorr, the power supply of 1000 W, and the flow
ratio of the etching gases CF_4/O_2 of 60/10 sccm.

The resist film 106 is etched in the initial stage
with the resist pattern 108 used as a mask. However,
the resist pattern 108 is etched away completely during
the etching process, with the result that the resist
film 106 is etched finally with the SOG film 107 used
as a mask. FIG. 24E is a cross sectional view showing
the state in this stage. As shown in the drawing, a
fifth open portion O5 corresponding to the first
contact hole and a sixth open portion O6 corresponding
to the second wiring trench are formed in the resist
film 106. The etching in this stage is carried out
under, for example, the pressure of 40 mTorr, the power
supply of 500 W, and the flow ratio of the etching
gases N_2/O_2 of 150/10 sccm.

Where the etching is carried out under the
conditions given above, the etching selectivity ratio

of the resist film 106 relative to the SOG film 107 is
50 or more. Also, the etching selectivity ratio of the
SiO_2 film 102 relative to the resist film 106 is very
high, i.e., 100 or more. The etching selectivity ratio

5   of the resist film 106 relative to the polysilicon film
103 is also rendered high, with the result that the
polysilicon film 103 performs the function of the
etching stopper.

In the next step, the SiO_2 film 102 is selectively

10   etched with the SOG film 107, the resist film 106 and
the polysilicon film 103 used as a mask so as to form
first and second contact holes in the SiO_2 film 102.
These first and second contact holes are connected to
first and second conductive regions (not shown), e.g.,

15   diffusion layers, respectively, formed in the surface
region of the silicon substrate 101. The SOG film 107
is etched away during the etching process, with the
result that the SiO_2 film 102 is etched finally with
the resist film 106 and the polysilicon film 103 used

20   as a mask. FIG. 24F is a cross sectional view showing
the state in this stage.

The SiO_2 film 102 is etched under, for example,
the pressure of 20 mTorr, the power supply of 1,400 W,
and the flow ratio of the etching gases $C_4F_8/CO/O_2/Ar$

25   of 10/50/5/100 sccm. Where the SiO_2 film 102 is etched
under the conditions given above, the etching
selectivity ratio of the SiO_2 film 102 relative to the

resist film 106 is about 15, and the etching
selectivity ratio of the resist film 106 relative to
the polysilicon film 103 is about 40.

Incidentally, the description given above covers
5   the case where the conductive region such as a
diffusion layer formed in a surface region of the
substrate constitutes the underlying layer. However,
it is also possible for the metal wiring layer formed
on the silicon substrate 101 to constitute the
10   underlying layer. In this case, the wiring layer
employed in this embodiment is in the form of a multi-
layered wiring film comprising a plurality of layers.

In the next step, the resist layer 106 is removed
by O_2 RIE, followed by etching the SiO_2 film with the
15   polysilicon film 103 (hard mask) used as a mask so as
to form a first wiring trench on the surface of the
SiO_2 film 102, as shown in FIG. 24G. The etching
conditions in this step are equal to the etching
conditions in the previous step of forming the first
20   and second contact holes.

After the etching of the SiO_2 film 102, a metal
film forming a barrier metal film or a liner film 109
(intermediate film) and a plug or a plug/wiring 110 is
deposited on the entire surface, followed by applying a
25   CMP treatment so as to remove the undesired barrier
metal film 109 and the undesired metal film outside the
first wiring trench and the first and second contact

holes and to planarize the surface. As a result, formed are two dual-damascene structures and a single plug between the two dual-damascene structures.

Incidentally, the plug or the plug/wiring 110 includes the plug (plug body that does not include the intermediate film) of the wiring structure (first wiring structure) having a high wiring upper surface, the plug (plug body that does not include the intermediate film) of the wiring structure (second wiring structure) having a low wiring upper surface, and the wiring (wiring body that does not include the intermediate film). In the following description, the plug 110 represents the plug of the first wiring structure, and the wiring 110 represents the wiring of the second wiring structure.

Where the plug or the plug/wiring 110 is formed of a Cu or an Al-Cu material, it is possible for the barrier metal film or the liner film 109 to be formed of, for example, a conductive film such as a Ti film, a TiN film, a Ta film, a TaN film, or a Ti/TiN film or an insulating thin film having a thickness that permits assuring the electrical connection.

The material of the plug or the plug/wiring 110 is not limited to the Cu or Al-Cu material. It is also possible to use, for example, W, polysilicon, Al, Al-Si-Cu, Ag, Au or WSi for forming the plug or the plug/wiring 110. Depending on the material used for

forming the plug or the plug/wiring 110, it is
unnecessary to use the barrier metal film or the liner
film 109.

Also, where the plug or the plug/wiring 110 is
formed of Al, it is possible for the barrier metal film
or the liner film 109 to be formed of, for example, a
Nb film or a NbN film.

In the next step, a SiO_2 film 111 forming an
interlayer insulating film is deposited on the entire
surface, as shown in FIG. 24I. After formation of the
SiO_2 film 111, an anti-reflection film 112 and a resist
pattern 113 are formed successively on the SiO_2 film
111, as shown in FIG. 24J. The resist pattern 113 has
an open portion corresponding to the second wiring
trench.

Further, the SiO_2 film 111 is etched with the
resist pattern 113 used as a mask so as to form in the
SiO_2 film 111 a second wiring trench connected to the
barrier metal or the liner film 109 and the plug 110,
as shown in FIG. 24K. The second wiring trench is
substantially parallel to the first wiring trench.

The drawing covers the case where the bottom of
the second wiring trench is flush with the upper
surface of the wiring 110, i.e., the drawing covers an
ideal case. However, it is practically possible for
the bottom of the second wiring trench to be lower than
the upper surface of the wiring 110. As a result, the

bottom surface of the wiring (including the barrier metal film or the liner film, if such a film is formed) formed within the second wiring trench in the subsequent step is actually rendered lower than the

5   upper surface of the wiring 110 in many cases.

In the next step, the resist pattern 113 and the anti-reflection film 112 are removed as shown in FIG. 24L. If the anti-reflection film 112 is a film containing carbon as a main component, the resist

10   pattern 113 and the anti-reflection film 112 can be peeled off simultaneously by an asher.

Finally, a metal film forming a barrier metal film or a liner film 114 and a wiring 115 (wiring body) is deposited on the entire surface, followed by applying a

15   CMP treatment so as to remove the undesired metal film or the liner film 114 and the metal film outside the wiring trench so as to form the metal wiring 115 and to planarize the surface, as shown in FIG. 24M.

As a result, formed are two dual damascene wirings

20   differing from each other in height and constituting a wiring layer of an identical wiring level (a first level in this case). It should be noted, however, that it is necessary in terms of the manufacturing process to carry out twice the burying step of the conductive

25   material etc. for forming the high dual damascene wiring and, thus, the high dual damascene wiring cannot be correctly called a dual damascene wiring. In the

present invention, these wirings differing from each
other in height are called the dual damascene wiring
for the sake of convenience because these wirings also
differ from the so-called "single damascene wiring".

5   The materials of the barrier metal film or the
liner film 114 and the wiring 115 are equal to the
materials of the barrier metal film or the liner film
109 and the plug or the plug/wiring 110, respectively.
It may be possible, however, to use different materials
10   for these portions. For example, the wiring 115 may be
formed of Ag or Au and the wiring portion of the
plug/wiring 110 may be formed of Cu. It may be
unnecessary to form the barrier metal film or the liner
film 114 depending on the material of the wiring 115.

15   A first modification of the twenty-second
embodiment is shown in FIGS. 25A to 25C. Various
combination of portions, where the barrier metal films
or the liner films are formed to cover the plug or the
plug/wiring, is presented as far as the manufacturing
20   step shown in FIG. 24M.

In FIG. 25A, the barrier metal films or the liner
films 109 and 114 are not formed to cover the plug or
the plug/wiring 110, 115. When the plug or the
plug/wiring 110, 115 is formed of Al, the barrier metal
25   films or the liner films for preventing Al thermal
diffusion into the SiO_2 films 102 and 111 and for
enhancing adhesion to the SiO_2 films 102 and 111 are

not needed, because Al is a low melting point metal and has excellent adhesive properties to the SiO_2 films 102 and 111.

The barrier metal films or the liner films 109 are formed to cover the plug and plug/wiring 110 and are not formed to cover the wiring 115 in FIG. 25B. For example, when the plug or the plug/wiring 110 is formed of a metal which is needed to prevent the thermal diffusion or to enhance adhesion and the wiring 115 is formed of other metal which is of no problem concerning to the thermal diffusion and adhesion, the wiring structure as shown in FIG. 25B is possible.

The barrier metal films or the liner films 109 are formed to cover only the wiring 115 in FIG. 25C. For example, when the wiring 115 is formed of a metal which is needed to prevent the thermal diffusion or to enhance adhesion and the plug or the plug/wiring 110 is formed of other metal which is of no problem concerning to the thermal diffusion and adhesion, the wiring structure as shown in FIG. 25C is possible.

As described above, it is possible for the materials of the barrier metal film or the liner film 114 and the wiring 115 to be different from the materials of the barrier metal or the liner film 109 and the plug or the plug/wiring 110, respectively. For example, it is possible for the plug or the plug/wiring 110 to be formed of Cu and for the wiring 115 to be

formed of Al, Cu, Ag or Au, and vice versa. In other
words, it is possible to use different materials for
forming the first and second wirings.

In FIGS. 25A to 25C of the first modified example,
when the plug or the plug/wiring 110 is formed of a Cu
or an Al-Cu material, it is possible for the barrier
metal film or the liner film 109 to be formed of, for
example, a conductive film such as a Ti film, a TiN
film, a Ta film, a TaN film, or a Ti/TiN film or an
insulating thin film having a thickness that permits
assuring the electrical connection.

The material of the plug or the plug/wiring 110 is
not limited to the Cu or Al-Cu material. It is also
possible to use, for example, W, polysilicon, Al,
Al-Si-Cu, Ag, Au or WSi for forming the plug or the
plug/wiring 110. Depending on the material used for
forming the plug or the plug/wiring 110, it is
unnecessary to use the barrier metal film or the liner
film 109. Also, where the plug or the plug/wiring 110
is formed of Al, it is possible for the barrier metal
film or the liner film to be formed of, for example, a
Nb film or a NbN film.

As described above, it is possible in this
embodiment to obtain a wiring layer in which the wiring
structures differing from each other in the height of
the wiring (plug + wiring) are formed alternately. In
other words, it is possible to obtain a wiring layer in

which the side surfaces of the two adjacent wirings of
the different wiring structures are not positioned to
face each other. As a result, the wiring is positioned
to face the adjacent plug so as to increase the wiring

5   distance between the adjacent wiring structures so as
to lower the inter-wiring parasitic capacitance.

It should also be noted that this embodiment is
directed to the case where the cross sectional shape of
the first wiring having the high upper surface of the

10   wiring is equal to the cross sectional shape of the
second wiring having the low upper surface of the
wiring. However, it is not absolutely necessary for
the cross sectional shapes of the first and second
wirings to be equal to each other in order to obtain

15   the effect of decreasing the inter-wiring parasitic
capacitance.

As will be described in a second modification of
this embodiment, where the cross sectional area of the
first wiring is larger than the cross sectional area of

20   the second wiring, where the first wiring width is
larger than the second wiring width, or even where the
thickness of the first wiring is larger than the
thickness of the second wiring, it is possible to
obtain a similar effect, as long as the lower surface

25   of the first wiring is not higher than the upper
surface of the second wiring. This applies to all the
embodiments relating to the wiring structure described

in the following.

FIGS. 26A to 26C collectively show a second modification of this embodiment. The wiring structure shown in FIG. 26A differs from this embodiment in that the size of the wiring 115 in the lateral direction (wiring width direction) is larger than that in this embodiment. As a result, the cross sectional area of the wiring 115 is rendered larger than that of the wiring 110.

The wiring structure shown in FIG. 26B differs from this embodiment in that the distance between the two adjacent wiring in the wiring width direction is decreased within a range that the high wiring 115 is not brought into an electrical contact with the low wiring 110.

The wiring structure shown in FIG. 26C differs from this embodiment in that the wiring 115 extends in a vertical direction.

FIGS. 27A and 27B show a third modification of this embodiment. The wiring structures shown in FIGS. 27A and 27B differ from this embodiment in that a single high wiring 115 and a single low wiring 110 are not formed alternately. FIG. 27A shows an example that two high wirings 115 and two low wirings 110 are formed alternately, and FIG. 27B shows an example that a single high wiring 115 and two low wirings 110 are formed alternately. What should be noted is that it

suffices for a single high wiring 115 and a plurality of low wirings 110 to be formed alternately, for a plurality to high wirings 115 and a single low wiring 110 to be formed alternately, or for a plurality of high wirings 115 and a plurality of low wirings 110 to be formed alternately.

As described above, it is possible to suppress effectively the signal transmission delay caused by the inter-wiring parasitic capacitance which is rendered prominent with the decrease in the distance between the adjacent wirings. By contraries, if the distance between the adjacent wirings is the same, the signal transmission speed is increased.

The wiring structures shown in FIGS. 25A to 25C, 26A to 26C and descriptions in the first and second modifications of this embodiment also apply to the wiring structures shown in FIGS. 27A and 27B. According to this embodiment, it suffices to change alternately the heights of the wirings, and the conventional wiring pattern as viewed from above can be left unchanged, with the result that the pattern of the wiring layer can be designed easily.

In FIG. 24M, it is desirable for the distance L1 in the wiring width direction, between the two adjacent wirings of the wiring structures differing from each other in height, to be not larger than 0.13 μm. In the case of such a fine wiring, the influence of the

parasitic capacitance is large, which greatly improves
the effect of the present invention. The lower limit
of the distance L1 noted above is not smaller than
zero.

5   Also, the ratio of size L2 (L5) in the width
direction of the wiring (wiring body + intermediate
film) to the size L3 (L4) in the wiring width direction
of the plug (plug body + intermediate film), i.e., the
ratio L2/L3 (L5/L4), should typically be 10 or less in
10   each of the wiring structures differing from each other
in height. On the other hand, the lower limit of the
ratio noted above is larger than 1.

It is possible to decrease the length L1 to
0.01 μm. On the other hand, the minimum wiring width

Also, in this embodiment, the wiring 115 is
arranged in an upper portion so as to make it possible
15   to set the ratio L2/L1 at a value not smaller than 1,
i.e., $1 \leqq L2/L1$. In the conventional case, the ratio
L2/L1 is set at 1.

It is possible to decrease the length L1 to
0.01 μm. On the other hand, the minimum wiring width
20   that can be achieved nowadays is 0.13 μm. It follows
that the present technology makes it possible to
decrease the ratio of L2/L1 to 13.

In this embodiment, the polysilicon film 103 is
used as the hard mask. Alternatively, it is possible
25   to use a silicon nitride film, an SiC film, a tungsten
film or a WSi film as the hard mask. Also, the SiO_2
film (silicon oxide film) 102 is used as the interlayer

insulating film in this embodiment. However, it is also possible to use an inorganic silicon oxide film, a low-k film or an organic silicon oxide film in place of the SiO_2 film.

5   Incidentally, the organic silicon oxide film and the inorganic silicon oxide film can be formed easily by forming the portion of the interlayer insulating film by using an organic silicon film in place of the SiO_2 film, followed by introducing oxygen into the

10   organic silicon film in the processing step of the interlayer insulating film by the dry etching process so as to convert the organic silicon film into an organic silicon oxide film and an inorganic silicon oxide film, as already described in conjunction with

15   the first embodiment. Incidentally, it is possible to use an organic silicon film containing oxygen as a constituting element in place of the SiO_2 film.

In this case, it is possible to decrease the dielectric constant of the organic silicon oxide film

20   and the inorganic silicon oxide film, compared with the dielectric constant of the SiO_2 film 102, by controlling the degree of oxidation of the organic silicon film, so as to make it possible to suppress effectively the signal transmission delay caused by the

25   inter-wiring parasitic capacitance.

The low-k films having a particularly small value of the dielectric constant include, for example, an

organic silicon oxide film such as a polysiloxane film
or a benzocyclobutene film (BCB), an inorganic silicon
oxide film such as a hydrogen-silsesque oxane film, and
a CF-based organic silicon film such as a polyarylene
5   ether film, a Parylene film or a polyimide fluoro
polymer film.

          <Twenty-third embodiment>

          FIGS. 28A to 28F are cross sectional views
collectively showing a method of manufacturing a
10   semiconductor device according to a twenty-third
embodiment of the present invention. In the twenty-
third embodiment, the portions corresponding to the
twenty-second embodiment shown in FIGS. 24A to 24M are
denoted by the same reference numerals so as to avoid
15   an overlapping description. It follows that, where the
specific thickness, material, operating conditions,
produced effects, etc. are not referred to in the
following description, the specific thickness,
material, operating conditions, produced effects, etc.
20   described previously with reference to FIGS. 24A to 24M
are applied in the twenty-third embodiment of the
present invention.

          In the first step, the steps shown in FIGS. 24A to
24H included in the twenty-second embodiment described
25   previously are carried out as shown in FIG. 28A. Then,
an organic silicon oxide film 116 is deposited on the
entire surface as an interlayer insulating film, as

shown in FIG. 28B. After deposition of the interlayer
insulating film 116, the steps shown in FIGS. 24J to
24M for the twenty-second embodiment are carried out as
shown in FIGS. 28C to 28F.

5   According to the twenty-third embodiment of the
present invention, the organic silicon oxide film 116
is used as the interlayer insulating film so as to make
it possible to further lower the inter-wiring parasitic
capacitance, compared with the twenty-second

10   embodiment. Incidentally, in the twenty-third
embodiment of the present invention, the organic
silicon oxide film 116 is used as the interlayer
insulating film as pointed out above. Alternatively,
it is also possible to use a film having a low

15   dielectric constant such as a low-k film or an
inorganic silicon oxide film in place of the organic
silicon oxide film 116.

Further, the combination of the first insulating
film, i.e., the SiO_2 film 102 in this case, buried in

20   the plug/wiring 110 and the second insulating film,
i.e., the organic silicon oxide film 116 in this case,
buried in the wiring 115 is not limited to the
combination of the SiO_2 film 102 and the organic
silicon oxide film 116. In other words, it is possible

25   for each of the first and second insulating films to be
formed of any combination of different insulating films
selected from the group consisting of the low-k film,

the inorganic silicon oxide film and the organic
silicon oxide film. What should be noted is that it is
possible to form the interlayer insulating film by
utilizing the difference in the etching rate as long as
5   the first and second wirings are formed of different
materials.

Incidentally, where the parasitic capacitance in
the wiring structure having the lower upper surface of
the wiring (second wiring structure in the twenty-
10   second embodiment) raises a problem in the twenty-third
embodiment, it is possible to use a film having a low
dielectric constant such as the organic silicon oxide
film 116 in place of the SiO_2 film 102, which is
opposite to that in the twenty-third embodiment. It is
15   also possible to employ various additional
modifications.

The low-k films having a particularly small value
of the dielectric constant include, for example, an
organic silicon oxide film such as a polysiloxane film
20   or a benzocyclobutene film (BCB), an inorganic silicon
oxide film such as a hydrogen-silsesque oxane film, and
a CF-based organic silicon film such as a polyarylene
ether film, a Parylene film or a polyimide fluoro
polymer film.

25   Where the plug or the plug/wiring 110 is formed of
a Cu or an Al-Cu material, it is possible for the
barrier metal film or the liner film 109 to be formed

of, for example, a conductive film such as a Ti film, a TiN film, a Ta film, a TaN film, or a Ti/TiN film or an insulating thin film having a thickness that permits assuring the electrical connection.

5   The material of the plug or the plug/wiring 110 is not limited to the Cu or Al-Cu material. It is also possible to use, for example, W, polysilicon, Al, Al-Si-Cu, Ag, Au or WSi for forming the plug or the plug/wiring 110. Depending on the material used for

10   forming the plug or the plug/wiring 110, it is unnecessary to use the barrier metal film or the liner film 109. Where the plug or the plug/wiring 110 is formed of Al, it is possible for the barrier metal film or the liner film to be formed of, for example, a Nb

15   film or a NbN film.

It should be noted that the wiring structures shown in FIGS. 25A to 25C, 26A to 26C and descriptions in the first and second modifications of the twenty-second embodiment also apply to the wiring structure

20   shown in FIG. 28F.

<Twenty-fourth embodiment>

FIGS. 29A to 29F are cross sectional views collectively showing a method of manufacturing a semiconductor device according to a twenty-fourth

25   embodiment of the present invention.

In the first step, the steps of the twenty-second embodiment shown in FIGS. 24A to 24H are carried out,

as shown in FIG. 29A. Then, a low-k film 117 is formed on the entire surface, as shown in FIG. 29B. The low-k film 117 is a CF-based film such as a flare film or a silk film. It is also possible to use a

5   carbon-based film that does not contain Si such as a resist film or a carbon film itself as the low-k film, with substantially the same effect.

In the next step, an SOG film 107 having a thickness of 100 nm and a resist pattern 113 having

10   a thickness of 300 nm are successively formed on the low-k film 117, as shown in FIG. 29C. Further, an anisotropic etching is applied to the SOG film 107 with the resist pattern 113 used as a mask so as to transfer the pattern of the resist pattern 113 into the SOG film

15   107, followed by etching the low-k film 117 with the resist pattern 113 and the SOG film 107 used as a mask so as to form a wiring trench in the low-k film 117.

The low-k film is etched in the initial stage with the resist pattern 113 used as a mask. However, since

20   the resist pattern 113 is etched away during the etching process, the low-k film is etched finally with the SOG film 107 used as a mask. FIG. 29D is a cross sectional view showing the state in this stage.

The SOG film 107 is etched under, for example,

25   the pressure of 20 mTorr, the power supply of 1,000 W, and the flow ratio of the etching gases CF_4/O_2 of 60/10 sccm. On the other hand, the low-k film 117 is

etched under, for example, the pressure of 40 mTorr, the power supply of 500 W and the flow ratio of the etching gases N_2/O_2 of 150/10 sccm. Where the etching is carried out under these conditions, the etching

5 selectivity ratio of the low-k film 117 relative to the SOG film 107 is about 50. The etching selectivity ratio of the low-k film 117 relative to the SiO_2 film 102 is rendered very high, i.e., 100 or more.

In the next step, a metal film forming a barrier

10 metal film or the liner film 114 and the wiring 115 is deposited on the entire surface, as shown in FIG. 29E, followed by applying a CMP treatment so as to remove the undesired barrier metal film or the liner film 115 and the metal film and the SOG film 107 outside the

15 wiring trench, to form the wiring 115, and to planarize the surface. Then, the SOG film 107 is deposited again on the entire surface. Incidentally, it is possible to finish the wiring formation in this stage without forming an air-bridge wiring described in the

20 subsequent step.

As shown in FIG. 29F, a hole is made in the SOG film 107 formed on the low-k film 117, followed by removing the low-k film 117 by an O_2 asher so as to form an air-bridge wiring. By converting the upper

25 wiring 115 into the air-bridge wiring in this fashion, it is possible to suppress more effectively the signal transmission delay caused by the inter-wiring parasitic

capacitance.

The role played by the SOG film 107 formed on the low-k film 117 will now be described. If the SOG film 107 is removed after formation of the wiring 115 shown in FIG. 29F, followed by removing the low-k film 117, it is possible to suppress similarly the signal transmission delay caused by the inter-wiring parasitic capacitance. However, if the SOG film 107 is removed, it is impossible to laminate a multi-layered wiring structure on the upper layer. In this fashion, the SOG film 107 plays the role of the supporting substrate in further laminating a multi-layered wiring structure on the upper layer after formation of the air-bridge wiring.

In the twenty-fourth embodiment the low-k films having a particularly small value of the dielectric constant other than the flare film or the silk film include, for example, an organic silicon oxide film such as a polysiloxane film or a benzocyclobutene film (BCB), an inorganic silicon oxide film such as a hydrogen-silsesque oxane film, and a CF-based organic silicon film such as a polyarylene ether film, a Parylene film or a polyimide fluoro polymer film.

Where the plug or the plug/wiring 110 is formed of a Cu or an Al-Cu material, it is possible for the barrier metal film or the liner film 109 to be formed of, for example, a conductive film such as a Ti film,

a TiN film, a Ta film, a TaN film, or a Ti/TiN film or an insulating thin film having a thickness that permits assuring the electrical connection.

The material of the plug or the plug/wiring 110 is
5 not limited to the Cu or Al-Cu material. It is also possible to use, for example, W, polysilicon, Al, Al-Si-Cu, Ag, Au or WSi for forming the plug or the plug/wiring 110. Depending on the material used for forming the plug or the plug/wiring 110, it is
10 unnecessary to use the barrier metal film or the liner film 109. Where the plug or the plug/wiring 110 is formed of Al, it is possible for the barrier metal film or the liner film to be formed of, for example, a Nb film or a NbN film.

15 Also, the wiring structures shown in FIGS. 25A to 25C, 26A to 26C and descriptions given in the first and second modifications of the twenty-second embodiment apply to the wring structures shown in FIGS. 29E and 29F.

20 <Twenty-fifth embodiment>
FIGS. 30A to 30D are cross sectional views collectively showing a method of manufacturing a semiconductor device according to a twenty-fifth embodiment. This embodiment is directed to the case
25 where all the wiring structures in the same layer are of the air-bridge wiring structure.

In the first step, the steps of the twenty-second

embodiment shown in FIGS. 24A to 24H are carried out as shown in FIG. 30A. It should be noted, however, that a low dielectric constant film 118 is used in the twenty-fifth embodiment in place of the SiO_2 film 102. It is possible to use the material used for forming the low dielectric constant film 117 in the twenty-fourth embodiment can be used for forming the low dielectric constant film 118 in the twenty-fifth embodiment.

In the next step, a low dielectric constant film 117 is formed on the entire surface, as shown in FIG. 30B. Then, an SOG film 107 and a resist pattern 113 are formed on the low dielectric constant film 117, as shown in FIG. 30C. Further, an anisotropic etching is applied to the SOG film 107 with the resist pattern 113 used as a mask so as to transfer the pattern of the resist pattern 113 onto the SOG film 107, followed by etching the low-k film 117 with the resist pattern 113 and the SOG film 107 used as a mask so as to form a wiring trench in the low-k film 117.

The low-k film 117 is etched in the initial stage with the resist pattern 113 used as a mask. However, since the resist pattern 113 is etched away during the etching treatment, the low-k film 117 is etched finally with the SOG film 107 used as a mask. FIG. 30D is a cross sectional view showing the state in this stage. The etching conditions of the SOG film 107 and the low-k film 117 are equal to the etching conditions in the

twenty-fourth embodiment.

In the next step, a metal film forming a barrier metal film or the liner 114 and the wiring 115 is deposited on the entire surface, followed by applying a CMP treatment so as to remove the undesired barrier metal film or the liner film 114 and the metal film outside the wiring trench, to form the wiring 115, and to planarize the surface. Incidentally, it is also possible to form again the SOG film 107 on the entire surface as in the twenty-fourth embodiment shown in FIG. 30E.

Further, a hole is made in a part of the SOG film 107 formed on the low-k film 117, followed by removing the low-k films 117 and 118 by an O_2 asher so as to form an air-bridge wiring. By converting the entire wiring structure within the same layer into the air-bridge structure in this fashion, it is possible to suppress more effectively the signal transmission delay caused by the inter-wiring parasitic capacitance.

Incidentally, each of the twenty-fourth and twenty-fifth embodiments of the present invention described above is directed to the case where the silicon substrate 101 provides the underlying layer. However, the underlying layer in the steps described above is not limited to the silicon substrate. Needless to say, it is possible to form the similar air-bridge structure on a layer of an optional

material.

In the twenty-fifth embodiment, the low-k films having a particularly small value of the dielectric constant include, for example, an organic silicon oxide film such as a polysiloxane film or a benzocyclobutene film (BCB), an inorganic silicon oxide film such as a hydrogen-silsesque oxane film, and a CF-based organic silicon film such as a polyarylene ether film, a Parylene film or a polyimide fluoro polymer film.

Where the plug or the plug/wiring 110 is formed of a Cu or an Al-Cu material, it is possible for the barrier metal film or the liner film 109 to be formed of, for example, a conductive film such as a Ti film, a TiN film, a Ta film, a TaN film, or a Ti/TiN film or an insulating thin film having a thickness that permits assuring the electrical connection.

The material of the plug or the plug/wiring 110 is not limited to the Cu or Al-Cu material. It is also possible to use, for example, W, polysilicon, Al, Al-Si-Cu, Ag, Au or WSi for forming the plug or the plug/wiring 110. Depending on the material used for forming the plug or the plug/wiring 110, it is unnecessary to use the barrier metal film or the liner film 109. Where the plug or the plug/wiring 110 is formed of Al, it is possible for the barrier metal film or the liner film to be formed of, for example, a Nb film or a NbN film.

Also, the wiring structures shown in FIGS. 25A to
25C, 26A to 26C and descriptions in the first and
second modifications of the twenty-second embodiment
apply to the wiring structures shown in FIGS. 30E

5   and 30F.

<Twenty-sixth embodiment>

FIGS. 31A to 31F are cross sectional views
collectively showing a method of manufacturing a
semiconductor device according to a twenty-sixth

10   embodiment. This embodiment is directed to the case
where wiring layers differing from each other in height
are alternately formed in the same wiring layer by
using Al as the wiring material.

In the first step, an Al film providing the

15   material of the plug 119 is formed on the silicon
substrate 101, and a pattern of a TEOS oxide film is
formed on the Al film as a hard mask for processing the
Al film into plugs, as shown in FIG. 31A. The TEOS
oxide film is etched under, for example, the pressure
of 50 mTorr, the power supply of 1,000 W and the

20   flow ratio of the etching gases $C_4F_8/CO/Ar$ of
10/100/100 sccm. On the other hand, the Al film is
etched under, for example, the pressure of 4 mTorr, the
power supply of 500 W, and the flow ratio of the

25   etching gases Cl/O_2 of 75/10 sccm. In this case, the
etching selectivity ratio of the Al film relative to
the TEOS oxide film is about 50, with the result that

the TEOS oxide film provides a satisfactory etching mask relative to the Al film.

In the next step, the TEOS oxide film 121 is buried again in the clearance between the adjacent Al plugs 119 formed on the silicon substrate, followed by planarizing the surface and subsequently etching the TEOS oxide film with a resist film used as a mask so as to form a wiring trench connected to the Al plug 119.

Further, an Al film is deposited within the wiring trench and a CMP treatment (damascene process) is applied to the Al film so as to form an Al wiring 124 connected to the Al plug 119. Incidentally, a part of the Al film in which the wiring trench is not formed provides an Al plug having one edge exposed to the surface as shown in the central portion of FIG. 31A.

In the next step, an organic silicon oxide film 116 is deposited on the entire surface as an interlayer insulating film, followed by carrying out the steps of the twenty-third embodiment shown in FIGS. 24J to 24M, as shown in FIGS. 31C to 31F.

In the twenty-sixth embodiment, the organic silicon oxide film 116 is used as the interlayer insulating film so as to make it possible to decrease the inter-wiring parasitic capacitance. Incidentally, it is possible to use a low dielectric constant film such as a low-k film or an inorganic silicon oxide film in place of the organic silicon oxide film 116.

The low-k films having a particularly small value
of the dielectric constant include, for example, an
organic silicon oxide film such as a polysiloxane film
or a benzocyclobutene film (BCB), an inorganic silicon

5   oxide film such as a hydrogen-silsesque oxane film, and
a CF-based organic silicon film such as a polyarylene
ether film, a Parylene film or a polyimide fluoro
polymer film.

Also, it is possible for the first and second

10 insulating films to be a combination of different
insulating films selected from the group consisting of
a low-k film, an inorganic silicon oxide film and an
organic silicon oxide film as in the twenty-third
embodiment. An SiO$_2$ film may be used in place of the

15 organic silicon oxide film.

Also, a TEOS oxide film is used as a hard mask of
the Al film in the twenty-sixth embodiment. However,
it is also possible to use another insulating film such
as a silicon nitride film or an insulating film

20 containing silicon, nitrogen and oxygen (SiON film),
and an SiC film in place of the TEOS oxide film.

In the twenty-sixth embodiment of the present
invention, Al is used as the wiring material. However,
it is also possible to use another wiring material such

25 as W, polysilicon, Cu, Al-Cu, Al-Si-Cu, Ag, Au or WSi
in place of Al. Also, in the twenty-sixth embodiment,
a barrier metal and a liner film are not used.

However, it is possible to use a liner film, as
required. It is possible to use the barrier metal film
and the liner film used in, for example, the twenty-
second embodiment described previously.

5   That is, where the plug or the plug/wiring is
formed of a Cu or an Al-Cu material, it is possible for
the barrier metal film or the liner film to be formed
of, for example, a conductive film such as a Ti film, a
TiN film, a Ta film, a TaN film, or a Ti/TiN film or an

10   insulating thin film having a thickness that permits
assuring the electrical connection. Also, where the
plug or the plug/wiring is formed of Al, it is possible
for the barrier metal film or the liner film to be
formed of, for example, a Nb film or a NbN film.

15   Further, the twenty-sixth embodiment is directed
to the case where a conductive region such as a
diffused layer formed in a surface region of the
substrate is used as the underlying layer.
Alternatively, it is possible for the metal wiring

20   layer formed on the silicon substrate to provide the
underlying layer.

       As described above, it is possible to obtain a
wiring layer in which the Al wiring structures (Al plug
+ Al wiring) differing from each other in the height of

25   the wiring are alternately formed in the twenty-sixth
embodiment so as to make it possible to obtain the
effects similar to those obtained in the twenty-second

embodiment. Incidentally, it is possible to form the
Al air-bridge wiring structure described in each of the
twenty-fourth and twenty-fifth embodiments on the basis
of the Al wiring structure shown in FIG. 31F.

5   It should be noted that the wiring structures
shown in FIGS. 25A to 25C, 26A to 26C and descriptions
in the first and second modifications of the twenty-
second embodiment also apply to the wring structure
shown in FIG. 31F of this embodiment.

10   <Twenty-seventh embodiment>

A twenty-seventh embodiment of the present
invention will now be described with reference to
FIGS. 32A to 32F. In each of the twenty-second to
twenty-sixth embodiments described above, a single

15 layer damascene wiring having a small inter-wiring
parasitic capacitance is formed on a flat silicon
substrate. In the twenty-seventh embodiment, however,
formed is a single layer damascene wiring having a
small inter-wiring parasitic capacitance, said

20 damascene wiring being connected to the source-drain
diffusion layers of a MOS transistor formed on a
silicon substrate.

FIGS. 32A to 32F are cross sectional views
collectively showing a method of connecting a plug of

25 a single layer damascene wiring to the source-drain
diffusion layers by using a self-aligned contact (SAC).

It should be noted that a plug is connected to the

source-drain diffusion layers by employing an SAC using
SiO_2 and polysilane in the fifteenth embodiment
described previously. Also, the wirings buried in the
wiring trench and differing from each other in height
5   are connected to a plug in the twenty-second embodiment
so as to form a single layer damascene wiring having a
small inter-wiring parasitic capacitance. What should
be noted is that the method of the twenty-seventh
embodiment can be achieved by combining the methods
10   employed in the fifteenth embodiment and the twenty-
second embodiment referred to above.

The structure shown in FIG. 32A comprises the
silicon substrate 101, a gate insulating film 129, a
polysilicon film 130 and a tungsten silicide film 131
15   collectively forming a polyside gate, a silicon nitride
film 132 covering the polyside gate, an interlayer
insulating film 133, e.g., a BPSG film, having a
sufficiently large etching selectivity ratio relative
to the silicon nitride film, the polysilicon film 103
20   providing a hard mask of the interlayer insulating film
133, the resist film 106, the SOG film 107, and the
resist pattern 108.

In the structure shown in FIG. 32A, a polyside
gate is used as the gate of the MOS transistor.
25   However, it is also possible to use another gate
structure, such as a poly-metal gate. It should be
noted that the interlayer insulating film 133

corresponds to the SiO_2 film 102 shown in, for example
FIG. 24A referred to previously in conjunction with the
twenty-second embodiment.

In the next step, the resist film 106 is
selectively etched with the resist pattern 108 and the
SOG film 107 used as a mask. The resist film 106 is
etched in the initial stage with the resist pattern 108
used as a mask. However, since the resist pattern 108
is etched away during the etching process, the resist
film 106 is etched finally with the SOG film 107 used
as a mask.

In the next step, the interlayer insulating film
133 is selectively etched with the resist film 106 and
the SOG film 107 used as a mask. In this step, the SOG
film 107 is etched away, with the result that a contact
hole is formed in the self-aligned fashion in the
interlayer insulating film 133 in a manner to extend to
reach the source-drain regions (not shown) formed in a
surface region of the silicon substrate, as shown in
FIG. 32C.

In the next step, the resist film 106 is removed
by the O_2 RIE, followed by forming a wiring trench
having a low upper surface of the wiring on the surface
of the interlayer insulating film 133 as shown in
FIG. 32D and subsequently burying and planarizing a
metal film forming a plug or the plug/wiring 110 as
shown in FIG. 32E.

Then, an organic silicon oxide film 116 is formed
on the upper surface of the planarized interlayer
insulating film 133, followed by forming a wiring
trench having a high upper surface of the wiring by
5   using a resist pattern such that the upper surface of
the plug buried between the adjacent plug/wiring 110 on
both sides is exposed to the outside.

Further, a metal layer is buried in the wiring
trench having a high upper surface of the wiring so as
10   to form the plug/wiring 110, in the central portion
followed by planarizing the surface as shown in
FIG. 32F so as to form a single layer damascene wiring
having a decreased inter-wiring parasitic capacitance
and connected to the source-drain diffusion layers
15   formed in a surface region of the silicon substrate.

For forming the plug or the plug/wiring 110, it is
possible to use a pure metal such as polysilicon, Cu,
W, Al, Ag or Au, alloys such as Al-Cu, Al-Si-Cu or WSi
as well as other metal silicides. It is also possible
20   to bury different metals in the plug and the wiring
trench. The barrier metal film or the liner film (not
shown) is selected appropriately depending on the
material of the plug or the plug/wiring 110. For
example, where the plug or the plug/wiring 110 is
25   formed of Cu or Al-Cu, it is possible for the barrier
metal film or the liner film to be formed of, for
example, a Ti film, a Ti/TiN film, a TiN film, a TaN

film or a Ta film. Also, where the plug or the
plug/wiring 110 is formed of Al, it is possible for the
barrier metal film or the liner film to be formed of,
for example, a Nb film or a NbN film.

5   Also, in the twenty-seventh embodiment, it is
possible to use an inorganic silicon oxide film, an
organic silicon oxide film, low-k film and a SiO_2 film
such as a TEOS oxide film in addition to the BPSG film
as the interlayer insulating film 133. It is also

10   possible to use an SiO_2 film an inorganic silicon oxide
film or another low-k film in place of the organic
silicon oxide film 116 formed on the interlayer
insulating film 133. The organic silicon oxide film
116 and interlayer insulating film 133 may be formed of

15   the same material film, for example, a silicon oxide
film.

The low-k films having a particularly small value
of the dielectric constant include, for example, an
organic silicon oxide film such as a polysiloxane film

20   or a benzocyclobutene film (BCB), an inorganic silicon
oxide film such as a hydrogen-silsesque oxane film, and
a CF-based organic silicon film such as a polyarylene
ether film, a Parylene film or a polyimide fluoro
polymer film.

25   Further, if the organic silicon oxide film 116 is
covered again with the SOG film 107, followed by
removing the organic silicon oxide film 116 so as to

form an air-bridge wiring structure having a high upper surface, it is possible to further decrease markedly the inter-wiring parasitic capacitance, as described previously in conjunction with the twenty-fourth embodiment.

It should be noted that the wiring structures shown in FIGS. 25A to 25C, 26A to 26C and descriptions in the first and second modifications of the twenty-second embodiment also apply to the wiring structure shown in FIG. 32F.

Specifically, when the wiring structure of this embodiment is applied to form a multi-layered wiring structure, the organic silicon film 116 is preferably covered with an SiN film (or an SiC film) 132 again, as shown in FIG. 33A according to a modification of this embodiment.

At this time, organic silicon nitride film 132a being changed from organic silicon oxide film by introducing nitrogen on the surface of the organic silicon oxide film may be used instead of the SiN film 132 as shown in FIG. 33B. The SiN film (or the SiC film) 132 or the organic silicon nitride film 132a is useful as a substrate for forming upper layer wiring structure or is useful as a passivation film.

What should also be noted is that, since it is possible to form a SAC by using the organic silicon oxide film 116 in place of the interlayer insulating

film 133, it is possible to use an organic silicon
oxide film for forming the entire interlayer insulating
film surrounding the single layer damascene wiring
having a difference in height on the upper surface of
5   the wiring, as described previously in conjunction with
the sixteenth embodiment. In this case, it is possible
to use an inorganic silicon oxide film or another low-k
film in place the organic silicon oxide film, as
described previously in conjunction with the twenty-
10   fifth embodiment. Further, it is possible to decrease
markedly the inter-wiring parasitic capacitance by
removing the entire interlayer insulating film
surrounding the single layer damascene wiring having a
difference in height provided in the upper surface of
15   the wiring.

If the twenty-second to the twenty-sixth
embodiments are combined with the twenty-seventh
embodiment, many wiring structures improving the
performance of semiconductor devices are possible to
20   form.

<Twenty-eighth embodiment>

A twenty-eighth embodiment of the present
invention will now be described with reference to
FIGS. 34A to 34C. This embodiment is directed to a
25   method of forming a damascene wiring of a two-layer
structure having a difference in height provided in the
upper surface of the wiring on a single layer damascene

wiring having a difference in height provided in the
upper surface of the wiring.

In the twenty-seventh embodiment, an organic
silicon oxide film is deposited to form the interlayer

5   insulating film 116 on the upper surface of the single
layer damascene wiring after the process shown in
FIG. 32F. Then, the interlayer insulating film 116 is
planarized, followed by depositing an organic silicon
oxide film in the twenty-eighth embodiment so as to

10   form the interlayer insulating film 116 as shown in
FIG. 34A.

In the next step, a first mask (a hard mask)
consisting of a polysilicon film 103 is formed on the
upper surface of the interlayer insulating film 116,

15   followed by forming the resist film 106 on the
polysilicon film 103 and subsequently forming a second
mask consisting of the SOG film 107 on the resist film
106. The SOG film 107 formed on the resist film 106 is
patterned by using the resist film 108. The interlayer

20   insulating film may be formed of an SiO_2 film.

In the next step, the interlayer insulating film
116 and the resist film 106 formed on the interlayer
insulating film 116 are continuously etched by using
the first and second masks as shown FIG. 34B. In this

25   case, a difference in the etching depth required for
the etched region to reach the upper surface of the
lower wiring layer is generated because there is a

difference in height in the upper surface of the lower wiring layer. However, since the upper surface of the lower wiring layer performs the function of an etching stopper, it is possible to form a contact hole

5 extending to reach the upper surface of the lower wiring layer with a high reproducibility.

At this time, the resist film 106 is etched in the initial stage with the resist pattern 108 used as a mask. However, since the resist pattern 108 is etched

10 away during the etching treatment, the resist film 106 is etched finally with the SOG film 107 used as a mask. Then, the interlayer insulating film 116 is selectively etched with the SOG film 107 and the resist film 106 used as a mask. However, since the SOG film 107 is

15 etched away during the subsequent etching treatment, the interlayer insulating film 116 is etched finally with the polysilicon film 103 used as a mask. FIG. 34C is a cross sectional view showing the state in this stage.

20 After removing the polysilicon film 103, second layer metal materials are buried in the contact hole and the wiring trench shown in FIG. 34C, followed by carrying out the process shown in FIG. 32F described previously in conjunction with the twenty-seventh

25 embodiment so as to form a two-layered damascene wiring structure having a difference in height provided in the upper surface of the wiring. If a low-k film material

or the like is used in this case as the material of the interlayer insulating film, it is possible to decrease the inter-wiring parasitic capacitance. Also, the inter-wiring parasitic capacitance can be further

5   decreased, if the upper surface of the second layer damascene wiring having a difference in height and provided in the upper surface of the wiring is covered again with an SiN film or an SiC film, followed by removing the material of the interlayer insulating

10   film.

The SiN or SiC film covering the upper surface of the second layer damascene wiring plays a role of the supporting substrate in further forming the upper wiring layer, as well as a role of a passivation film.

15   <Twenty-ninth embodiment>

A twenty-ninth embodiment of the present invention will now be described with reference to FIGS. 35 to 38. This embodiment is directed to the case where the wiring structure described previously in conjunction

20   with the twenty-second to twenty-eighth embodiments is applied to the formation of a multi-layered wiring of a semiconductor device.

FIG. 35 is a cross sectional view showing the three-layered damascene wiring structure connected in a

25   self-aligned fashion to the source-drain regions (not shown) of a MOS transistor formed on a silicon substrate. The same reference numerals used for those

portions of FIG. 35 which correspond to the twenty-
seventh and twenty-eighth embodiments so as to avoid an
overlapping description.

The wiring structure shown in FIG. 35 comprises a
first layer wiring connected in a self-aligned fashion
between the polyside gate electrode and having a
difference in height provided in the upper surface of
the wiring, a second layer wiring formed on the first
layer wiring with the SiN or SiC film 132 interposed
therebetween and having a difference in height provided
in the upper surface of the wiring, a third layer
wiring formed on the second layer wiring with the SiN
or SiC film 132 interposed therebetween and having a
flat wiring surface, and the SiN or SiC film 132
covering the flat upper surface of the multi-layered
wiring.

The SiN or SiC film 132 plays the role of avoiding
the contamination of the interlayer with a heavy metal
and the role of the supporting substrate in the case
where the lower layer wiring is formed into an air-
bridge wiring structure. If such roles need not be
played, it is possible to omit the SiN or SiC film 132
so as to simplify the manufacturing process. Also, it
is possible to add easily the barrier metal film and
the liner film covering the metal material buried as
the plug or the plug/wiring, if it is necessary to do
so.

Also, in the wiring structure shown in FIG. 35, it is possible to derive easily from the description given previously in conjunction with the twenty-eighth embodiment the method of aligning the upper surface of the upper wiring layer in the same height when there is a difference in height provided in the upper surface of the lower wiring layer.

As described above, if the wiring structure having a difference in height is employed in the lower wiring layer in order to decrease the inter-wiring parasitic capacitance of the particularly fine lower wiring layer, and if the height of the uppermost thick wiring, which is small in the problem of the signal delay caused by the inter-wiring parasitic capacitance, is aligned in the same height so as to assure the flatness of the chip, it is possible to assure the passivation of the chip so as to improve the reliability of the semiconductor device.

FIG. 36 exemplifies a four-layered wiring structure prepared by introducing an additional single layer having a difference in height into the lower wiring shown in FIG. 35. As shown in FIG. 36, the four-layered wiring structure can be easily realized by simply repeating the forming process of the lower wiring shown in FIG. 35. Needless to say, a multi-layered wiring structure including an optional number of layers can be formed similarly.

FIG. 37 exemplifies a four-layered wiring structure aligning the upper surfaces of the uppermost and lowermost wiring layers and introducing additional intermediate wiring layers having a difference in height provided in the upper surfaces.

Also, it is possible to derive easily from these results the structure in which a difference in height is provided in the upper surface of a predetermined layer of the wiring structure, said predetermined layer giving rise to a serious problem of the signal delay caused by the inter-wiring parasitic capacitance.

FIG. 38 shows a four-layered damascene wiring in which each of the wiring layers is of a wiring structure free from a difference in height. Because of the particular construction, the multi-layered wiring shown in FIG. 38 has an inter-wiring parasitic capacitance larger than that of the wiring structure shown in each of FIGS. 36 and 37. However, it is possible to decrease the inter-wiring parasitic capacitance of the multi-layered wiring structure shown in FIG. 38 by using a low-k film for forming the interlayer insulating film or by partially introducing an air-bridge wiring structure into the wiring structure shown in FIG. 38. In this case, the manufacturing process can be simplified so as to reduce the manufacturing cost.

The wiring structure of the present invention is

not limited to those according to the twenty-second to
twenty-ninth embodiments described above. For example,
in each of the embodiments referred to above, a silicon
substrate is used as the semiconductor substrate.

5   However, it is also possible to use an SOI substrate in
order to further decrease the parasitic capacitance.
Further, it is possible to use a SiGe substrate for
coping with the further improvement in the transmitting
speed of the signal.

10   The wiring structures shown in FIGS. 25A to 25C,
26A to 26C and descriptions in the first and second
modifications of the twenty-second embodiment also
apply to the multi-layered wiring structures shown in
FIGS. 35 to 38. Needless to say, the multi-layered

15 wiring structures described above can be extended to
have an arbitrary number of wiring layers.

<Thirtieth embodiment>

FIGS. 39A to 39D are plan views collectively
showing various layouts of wiring structures on VLSI

20 chips 101 according to a thirtieth embodiment where
the multi-layered wiring structures described in the
twenty-ninth embodiment are applied to the formation
of respective layouts of the wiring structures.

Each of the wiring structures shown in FIGS. 35

25 to 38 is directed to show the case where the wiring
layers having a difference in height and low inter-
wiring coupling capacitance are introduced into the

lower wiring layers in the multi-layered wiring
structure. However, it is also possible to form the
wiring layers of low inter-wiring coupling capacitance
in some specific regions on the VLSI chip, thereby to
5   form very high speed functional blocks. Various
combination of regions where any one of the multi-
layered wiring structures shown in FIGS. 35 to 38 is
introduced on the surface of the VLSI chip will now be
described in this embodiment.

10   FIG. 39A show the simplest case where any one of
the multi-layered wiring structures shown in FIGS. 35
to 38 is introduced into the entire region 150 of the
VLSI chip 101. That is, all the circuits of the VLSI
chip are formed by using the same multi-layered wring
15   structure. In this case, the requirement of high-
speed circuit operation is met only by optionally
selecting wiring layers having a difference in height
among the layers constituting the multi-layered wiring
structure.

20   FIG. 39B shows the case where any one of the
multi-layered wiring structures shown in FIGS. 35 to
37 is formed in the region 152 and the multi-layered
wiring structure shown in FIG. 38 is formed in the
remaining region 151 of the VLSI chip 101.

25   It is very important to reduce parasitic
capacitance of bit lines so as to realize high-speed
operation of a semiconductor memory. For example, a

high speed cache memory is preferably formed in the
region 152 by using the multi-layered wiring structure
shown in FIG. 35 or FIG. 36 so as to largely reduce
parasitic capacitance of the bit lines owing to the
5   difference in height between adjacent bit line pairs.
A main memory of high memory capacity is formed in the
remaining region 151 by using the multi-layered wiring
structure shown in FIG. 38.

Because wiring structures shown in FIGS. 35 to 38
10   are compatible each other in the manufacturing
process, a high-speed memory system on a single chip
is thus realized easily. Needless to say, the
functional blocks formed in the regions 151 and 152
are not limited to the main memory and cache memory.
15   Any one of the functional blocks may be formed by
using any one of the multi-layered wiring structures
shown in FIGS. 35 to 38 so as to realize a high-speed
system on a single chip.

FIG. 39C shows the case where any one of the
20   multi-layered wiring structures shown in FIGS. 35 to
37 is formed in the regions 154 and 155 and the multi-
layered wiring structure shown in FIG. 38 is formed in
the remaining region 153 of the VLSI chip 101.

For example, a CPU and a high-speed cache memory
25   is preferably formed in the regions 154 and 155,
respectively, and a main memory of high memory
capacity is formed in the remaining region 153. Any

one of the functional blocks may be formed by using any one of the multi-layered wiring structures shown in FIGS. 35 to 38, thereby to realize a high-speed processing system on a single chip.

5   FIG. 39D shows the case where any one of the multi-layered wiring structures shown in FIGS. 35 to 37 is formed in the regions 157, 158 and 159 and the multi-layered wiring structure shown in FIG. 38 is formed in the remaining region 156 of the VLSI

10   chip 101.

For example, an ALU, a high-speed functional block such as a parallel multiplier, and a high-speed memory is preferably formed in the regions 157, 158 and 159, respectively, and peripheral circuits are

15   formed in the remaining region 156.   Needless to say, any one of the functional blocks may be formed in the regions 157, 158 and 159 by using any one of the multi-layered wiring structures shown in FIGS. 35 to 38.

20   <Thirty-first embodiment>

The structure of a dry etching machine to perform the RIE and the ashing step in each embodiment is shown in FIG. 34.   The dry etching machine incorporates a vacuum chamber 15, a subject 16 such as

25   silicon wafer, which must be processed, a retaining frame 17 on which the subject 16 is placed, an opposite electrode 18, a gas introducing pipe 19, an

exhaust opening 20, a high-frequency-wave source 21
and a magnet 22.

The retaining frame 17 has a regulating mechanism
to be capable of controlling the temperature of the
5   subject 16 which must be processed. The gas
introducing pipe 19 is connected to the upper inner
wall of the vacuum chamber 15 serving as the opposite
electrode 18. Gas is introduced into the vacuum
chamber 15 through the gas introducing pipe 19. The
10   valve at the exhaust opening 20 is operated to adjust
the pressure.

After the pressure has been stabilized, high
frequency waves are applied from the high-frequency-
wave source 21 under the retaining frame 17 so that
15   plasma is generated in the vacuum chamber 15. The
magnet 22 is joined to the vacuum chamber 15 to form a
dense magnetic field in the vacuum. Simultaneously,
an anisotropic characteristic is imparted to ions in
the plasma to etch the subject 16 which must be
20   processed.

The dry etching machine shown in FIG. 29 is a
magnetron RIE machine. Alternatively, another dry
etching machine may be employed which is exemplified
by a machine using ECR (Electron Cycloton Resonance),
25   helicon or inductance-coupled-type plasma.

Finally, a method of forming an organic silicon
film by performing a coating step using polysilane and

the like will now be described. Initially, an organic

silicon compound (generally called "organic silicon"

in the claims) having the main chains, which are

bondings of silicon and silicon, is dissolved in

5   organic solvent so that material of the solution is

prepared.

The organic silicon compound, having the main

chains which are bondings of silicon, and silicon are

exemplified by polysilane expressed by a general

10   formula $(SiR_{11}R_{12})$, where R11 and R12 are each a

hydrogen atom or substituted or non-substituted

aliphatic hydrocarbon or aromatic hydrocarbon or the

like having 1 to 20 carbon atoms.

Polysilane may be in the form of a single polymer

15   resist a copolymer. Alternatively, polysilane may

have a structure that two or more types of polysilane

materials are bonded to one another through an oxygen

atom, a nitrogen atom, a fatty acid group or an

aromatic group. The organic silicon compound is

20   exemplified by the following chemical formulas [1-1]

to [1-114]:

$+Si+_n$ [1-1]

$+Si+_n$ Me / H [1-2]

$+Si+_n$ [1-3]

$+Si+_n$ H [1-4]

$+Si+_n$ H [1-5]

$+Si+_n$ H [1-6]

$+Si+_n$ H [1-7]

$CH_2CH_3CF_3$ / $+Si+_n$ / H [1-8]

CH_3 / $+Si+_n$ / H [1-9]

C_2H_5 / $+Si+_n$ / H [1-10]

CF_3 / $+Si+_n$ / H [1-11]

F / $+Si+_n$ / H [1-12]

[1-13]

[1-14]

[1-15]

[1-16]

[1-17]

[1-18]

[1-19]

[1-20]

[1-21]

[1-22]

[1-23]

[1-24]

[1-25]

[1-26]

[1-27]

[1-28]

[1-29]

[1-30]

[1-31]

[1-32]

[1-33]

[1-34]

[1-35]

[1-36]

[1-37]

[1-38]

[1-39]

[1-40]

[1-41]

[1-42]

$$\begin{array}{ccc}
\begin{array}{c} CH=CH_3 \\ -(Si)_n- \\ CH=CH_2 \end{array} &
\begin{array}{c} CH_3 \\ -(Si)_n- \\ CH-CH=CH_2 \end{array} &
\begin{array}{c} \overset{O}{\overset{\|}{C}}-CH_3 \\ -(Si)_n- \\ CH=CH_2 \end{array} \\
[1\text{-}43] & [1\text{-}44] & [1\text{-}45]
\end{array}$$

$$\begin{array}{ccc}
\begin{array}{c} CH_3 \\ -(Si)_n- \\ C\equiv CH \end{array} &
-(Si)_n- \text{(phenyl)} &
-(Si)_n- \text{(naphthyl)} \\
[1\text{-}46] & [1\text{-}47] & [1\text{-}48]
\end{array}$$

$$\begin{array}{ccc}
-(Si)_n- \text{(anthracenyl)} &
-(Si)_n- \text{(alkyl chain)} &
\begin{array}{c} CF_3 \\ -(Si)_n- \text{(chain)} \end{array} \\
[1\text{-}49] & [1\text{-}50] & [1\text{-}51]
\end{array}$$

$$\begin{array}{ccc}
-(Si)_n-(Si)_m- \text{(Ph; CH_3, Ph)} &
-(Si)_n-(Si)_m- \text{(Ph; CH_2-CH_2-CH_3, CH_3, CH_3)} &
-(Si)_n-(Si)_m- \text{(Ph; CH_2-CH_2-CF_3, CH_3, CH_3)} \\
[1\text{-}52] & [1\text{-}53] & [1\text{-}54]
\end{array}$$

$$\begin{array}{cc}
\begin{array}{c} CH_2-CH_2-CH_3 \\ -(Si)_n- \\ CH_3 \end{array} &
-(Si)_n-(Si)_m- \text{(Ph; CH_3, Ph, Ph)} \\
[1\text{-}55] & [1\text{-}56]
\end{array}$$

[1-57]

[1-58]

[1-59]

[1-60]

[1-61]

[1-62]

[1-63]

[1-64]

[1-65]

[1-66]

[1-67]

[1-68]

[1-69]

[1-70]

[1-71]

[1-72]

[1-73]

[1-74]

[1-75]

[1-76]

[1-77]

[1-78]

[1-79]

[1-80]

[1-81]

[1-82]

[1-83]

[1-84]

[1-85]

[1-86]

[1-87]

[1-88]

[1-89]

[1-90]

[1-91]

[1-92]

[1-93]

[1-94]

[1-95]

[1-96]

[1-97]

[1-98]

[1-99]

[1-100]

[1-101]

[1-102]

[1-103]

[1-104]

[1-105]

[1-106]

[1-107]

[1-108]

[1-109]

[1-110]

[1-111]

[1-112]

[1-113]

[1-114]

where m and n are positive integers.

Although the weight average molecular weight of each compound is not limited, it is preferable that a range from 200 to 100,000 is satisfied. The reason for this will now be described. If the molecular weight is smaller than 200, the organic silicon film is dissolved by the solvent for the resist. If the molecular weight is larger than 100,000, dissolution in organic selective cannot be satisfactorily performed. Thus, formation of the material of the solution cannot easily be performed.

The organic silicon compound is not limited to one type. A plurality of types of compounds may be mixed. To improve preservation stability if necessary, addition of the following materials is permitted: a thermal polarization inhibitor, an adhesion enhancing agent for improving adhesion to the silicon insulating film, ultraviolet absorbing dye that is effective to prevent reflected light from the silicon insulating film into the resist film, a polymer such as polysulfon or polybenzimidazole for absorbing ultraviolet rays, a substance showing conductivity owing to a conductive substance, light or heat or a crosslinking material for crosslinking the organic silicon compound.

The conductive substance is exemplified by organic sulfonic acid, organic carboxylic acid, polyalcohol, polythiol (for example, iodine or

bromine), SbF_5, PF_5, BF_5 and SnF_5.

The substance showing conductivity owing to the energy of light or heat is exemplified by carbon cluster (C_{60} or C_{70}), cyanoanthracene,

5   dicyanoanthracene, triphenylpyryum, tetrafluoroborate, tetracyanoquinodimethane, tetracyanoethylene, futhalimidotriphrate, perchloropentacyclododecane, dicyanobenzen, benzotrynyl, trichloromethyltriazine, benzoilperoxide, benzophenon tetra carboxylic acid and

10   t-butylperoxide. The substance is exemplified by the following compounds:

[2-1]

[2-2]

[2-3]

[2-4]

[2-5]

[2-6]

[2-7]

[2-8]

[2-9]

[2-10]

[2-11]

[2-12]

[2-13]

[2-14]

[2-15]

[2-16]

[2-17]

[2-18]

[2-19]

[2-20]

[2-21]

[2-22]

[2-23]

[2-24]

[2-25]

[2-26]

[2-27]

[2-28]

[2-29]

[2-30]

[2-31]

[2-32]

[2-33]

$$\left[\!\!+\!\!\left\langle\bigcirc\right\rangle\!\!-\!\!I^{+}\!\!-\!\!\left\langle\bigcirc\right\rangle\!\!+\!\!\right] \quad BF_4^-$$

[2-34]

$$\left[\!\!+\!\!\left\langle\bigcirc\right\rangle\!\!-\!\!I^{+}\!\!-\!\!\left\langle\bigcirc\right\rangle\!\!+\!\!\right] \quad PF_6^-$$

[2-35]

$$\left[\!\!+\!\!\left\langle\bigcirc\right\rangle\!\!-\!\!I^{+}\!\!-\!\!\left\langle\bigcirc\right\rangle\!\!+\!\!\right] \quad SbF_6^-$$

[2-36]

$$\left[\!\!+\!\!\left\langle\bigcirc\right\rangle\!\!-\!\!I^{+}\!\!-\!\!\left\langle\bigcirc\right\rangle\!\!+\!\!\right] \quad CF_3SO_3^-$$

[2-37]

$$\overset{\oplus}{N_2} \quad SF_6^{\ominus}$$

[2-38]

$$\overset{\oplus}{N_2} \quad SF_6^{\ominus}$$

[2-39]

$$\overset{\oplus}{N_2} \quad \overset{\ominus}{OSO_2CF_3}$$

OMe

[2-40]

$$\overset{\oplus}{N_2} \quad \overset{\ominus}{BF_4}$$

OEt

[2-41]

$$\overset{\oplus}{N_2} \quad AsF_6^{\ominus}$$

S

[2-42]

$$CH_3O-\langle\bigcirc\rangle-CH=CH-\overset{CCl_3}{\underset{CCl_3}{\diagup}}$$

[2-43]

$$\overset{CH_3O}{\underset{CH_3O}{\overset{CH_3O}{\diagup}}}\langle\bigcirc\rangle-CH=CH-\overset{CCl_3}{\underset{CCl_3}{\diagup}}$$

[2-44]

CH_3S— —$CH=CH$— triazine(CCl_3)(CCl_3) [2-45]

CH_3O/CH_3O— —$CH=CH$— triazine(CCl_3)(CCl_3) [2-46]

CH_3O/OCH_3— —$CH=CH$— triazine(CCl_3)(CCl_3) [2-47]

CH_3/$CH_3$$N$— —$CH=CH$— triazine($CCl_3$)($CCl_3$) [2-48]

—$CH=CH$— triazine(CCl_3)(CCl_3) [2-49]

CH_3O— —$CH=CH$— triazine(CCl_3)(CCl_3) [2-50]

CH_3O/CH_3O/CH_3O— —$CH=CH$— triazine(CCl_3)(CCl_3) [2-51]

CH_3S— —$CH=CH$— triazine(CCl_3)(CCl_3) [2-52]

Cl_3C— triazine(CCl_3)(CCl_3) [2-53]

— triazine(CCl_3)(CCl_3) [2-54]

Cl— — triazine(CCl_3)(CCl_3) [2-55]

[2-56]

[2-57]

[2-58]

[2-59]

[2-60]

[2-61]

[2-62]

[2-63]

[2-64]

[2-65]

C_2H_5ONa

[2-66]

[2-67]

[2-68]

[2-69]

[2-70]

[2-71]

[2-72]

[2-73]

[2-74]

[2-75]

[2-76]

[2-77]

[2-78]

[2-79]

[2-80]

[2-81]

[2-82]

[2-83]

[2-84]

[2-85]

[2-86]

[2-87]

[2-88]

[2-89]

[2-90]

[2-91]
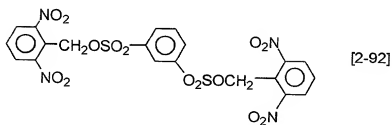
[2-92]

[2-93]

[2-94]

[2-95]

[2-96]

[2-97]


[2-98]

[2-99]

[2-100]


[2-101]

[2-102]

[2-103]

[2-104]

[2-105]

[2-106]

The crosslinking material is exemplified by an organic silicon compound having a multiple bond and an acrylic unsaturated compound. The solvent may be a polar organic solvent or a non-polar organic solvent. Specifically, the solvent is exemplified by ethyl lactate (EL), ethyl-3-ethoxy propionate (EEP), propylene glycol monomethylether acetate (PGMEA), propylene glycol monomethylether (PGME), ketone such as cyclohexane, 2-heptane, 3-heptane, acetylacetone or cyclopentanone, ester such as propylene glycol monoethyl ether acetate, ethylcellosolve acetate, methylcellosolve acetate, methyl-3-methoxypropionate, ethyl-3-methoxypropionate, methyl-3-ethoxypropionate, methyl pyruvate or ethyl pyruvate, ether such as diethylene glycol dimethylether or propyleneglycol dimethylether, glycol ester derivative such as methyl lactate or ethyl glycolate. Note that the solvent is not limited to the foregoing materials.

The coating material is prepared by the foregoing method. Then, the surface of the silicon insulating film is coated with the material of the solution by a spin coating method or the like. Then, the temperature is raised to vaporize the solvent so that the organic silicon film is formed. A glass transition temperature with which a satisfactory etching selective ratio with respect to the resist can be realized is required in the foregoing state. If

the satisfactory etching selective ratio with respect to the resist cannot be realized, the coated film is furthermore heated or irradiated with energy beams to crosslink the coated film.

5   The energy beam is exemplified by ultraviolet rays, X-rays, electron beams and ion beams. When heating and irradiation with the energy beam are simultaneously performed, the crosslinking reaction is quickened. Thus, the glass transition temperature can

10   be significantly raised in a practical range of process duration.

      Note that heating or irradiation with the energy beam sometimes causes bondings between silicon and the silicon that constitute the main chains in the organic

15   silicon compound to be broken. Thus, bonding with oxygen causes oxidation to easily occur, resulting in reduction in the etching selective ratio between the resist and the organic silicon film. In the foregoing case, it is preferable that heating and irradiation

20   with the energy beam are performed in an atmosphere in which the concentration of oxygen is lower than that in the air.

      The present invention is not limited to the description about the embodiments. In the foregoing

25   description, the structure has been formed such that the insulating film mainly constituted by the silicon oxide film and polysilane are stacked to change the

polysilane to the silicon oxide film or the silicon
nitride film. If similar methods are combined with
each other, the insulating film constituted by the
silicon nitride film and polysilane are stacked to
5   change polysilane to the silicon oxide film or the
silicon nitride film so as to be a portion of the
insulating film constituted by the silicon nitride
film. Alternatively, polysilane may be changed to the
silicon oxide film so as to be removed from the
10   insulating film constituted by the silicon nitride
film.

In the first to sixth embodiments, the dry
etching processing method is employed where the
interlayer film having the dual-damascene structure is
15   formed by using polysilane. The present invention is
not limited to the interlayer film having the dual-
damascene structure. As a matter of course, the
foregoing method may be applied to a common multiple
trench metallization. Moreover, a variety of
20   modifications may be permitted within the scope of the
present invention.

In the device manufacturing process, the organic
silicon film of the polysilicon group and the
insulating film are stacked with each other and
25   oxygen, nitrogen, or hydrogen are introduced into the
organic silicon film to be changed as a portion of the
insulating film as stated above.

In this case, a thin interlayer film containing the constituent organic silicon sometimes remains at the interface between the organic silicon film and the insulating film.

5   Relating to the present invention, however, no problem occurs concerning the manufactured device operation caused by the existence of such a thin and little remaining interface film.

As described above, the manufacturing method of 10 semiconductor devices by using dry etching technology according to the present invention has the structure that the organic silicon film constituted by polysilane and the like is used to form the insulating film of the semiconductor device or a portion of the 15 same by dry etching. The portion constituted by the organic silicon film is changed to an oxide or a nitride so that the portion constituted by the organic silicon film is integrated with the insulating film of the semiconductor device or a portion of the same. 20 If a similar method is employed, removal of the anti-reflective film which has been difficult for the conventional technology can easily be performed.

The surface region of the organic silicon film is selectively changed to an oxide or a nitride, and then 25 dry etching is performed by using the oxide or the nitride. Then, the process is performed such that the organic silicon film is made to be a portion of the

insulating film. A contact hole or the like having a higher aspect ratio as compared with that of the conventional resist mask can be formed.

When the dry etching method structured by combining the foregoing organic silicon films is applied, formation of the contact hole in the interlayer insulating film having the dual-damascene structure, the metallization trench and the dual-damascene structure metallization, which has been difficult, can be facilitated. Moreover, the etching mask incorporating the insulating film, having a high aspect ratio and required to form a deep trench in the silicon substrate can be formed.

Moreover, the present invention may widely be applied to the smoothing process of a device region and the device isolation region, formation of a SAC, and patterning of a precise gate electrode which are important factors in the manufacture of dense semiconductor integrated circuits at a satisfactorily high yield.

Additional advantages and modifications will readily occur to those skilled in the art. Therefore, the invention in its broader aspects is not limited to the specific details and representative embodiments shown and described herein. Accordingly, various modifications may be made without departing from the spirit or scope of the general inventive concept as

defined by the appended claims and their equivalents.